

EC-UP8P8C-6-003-TR-500

RJ45/8P8C, 6, 3

0,47-0,51

500

EC-UP8P8C-6-003-TR-500

8-

4-

6.


UL 94-V2

100

1000

✓ 0,47-0,51

✓ 3

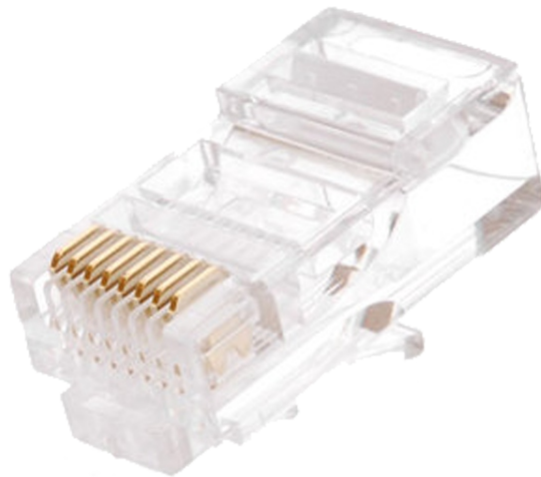

500

	EC-UP8P8C-6-003-TR-500					
	6					
	250					
	RJ45/8P8C					
	0,47-0,51					
	0,84-0,99					
	3					
	UL 94-V2					
	-40 +70 °C.		-10 +50 °C.		-30 +70 °C	
	500					
	1					

EC-UP8P8C-6-003-TR-500	6	RJ45/8P8C		500	0,003150	0,750
------------------------	---	-----------	--	-----	----------	-------