

DIN-I08

DIN Rail Versiport Module

The DIN-I08 is a DIN rail-mounted automation control module that provides eight Versiport I/O ports for interfacing with a wide range of third-party devices and systems. Each "Versiport" can be configured via software to function as a digital or analog sensing input, or as a digital trigger output.

Versiports

Configured as a digital input, the Versiport will sense a contact closure or logic level signal from devices such as motion detectors, partition sensors, alarm panels, 12V triggers, and all types of switches and relays. As an analog input, the Versiport can sense changes in a resistance or DC voltage level, working with everything from temperature and light sensors to water level meters to volume control potentiometers. As a digital output, the Versiport provides a logic level closure signal to trigger control and alarm inputs on a variety of external devices.

DIN Rail Installation

The DIN-I08 is designed to snap onto a standard DIN rail for installation in a wall mount enclosure or mounted on a wall panel. Wiring connections are made using detachable screw terminals positioned along the top and bottom, clearly accessible from the front for easy installation and servicing. All setup controls and indicators are positioned on the center front panel. When installed in an enclosure utilizing 45 mm cutouts, the DIN-I08's front panel stays accessible while the connections are concealed.

Cresnet®

The DIN-I08 communicates with a DIN-AP2 2-Series Automation Processor, or other Crestron 2-Series control system, via the Cresnet control network. Cresnet also powers the DIN-I08. A pair of Cresnet ports is provided on the DIN-I08 allowing for easy daisy-chaining of several DIN Rail Series automation control modules.

> 8 Versiport I/O ports

> Interface for 3rd-party sensors, detectors, contact closures, and alarms

> Fully programmable functionality via DIN-AP2

> Cresnet communications

> 6M wide DIN rail mounting

SPECIFICATIONS

Connections

I/O 1 - 8: (2) 5-pin 3.5mm detachable terminal blocks comprising (8) digital input/output or analog input ports (referenced to GND);
Digital Input: Rated for 0-24 Volts DC, input impedance 20k ohms, logic threshold 1.25 Volts DC;
Digital Output: 250 mA sink from maximum 24 Volts DC, catch diodes for use with "real world" loads;
Analog Input: Rated for 0-10 Volts DC, protected to 24 Volts DC maximum, input impedance 20k ohms;
Programmable 5 Volts, 2k ohms pull-up resistor per pin
NET: (2) 4-pin 3.5mm detachable terminal blocks, paralleled;
Cresnet slave port



Controls & Indicators

I/O 1 - 8: (8) Red LEDs, indicate status of Versiport I/O ports

NET ID: (2) 7-Segment green LED digits and (2) miniature pushbuttons for setting Cresnet ID

SETUP: (1) Red LED and (1) recessed miniature pushbutton for enabling setup mode and touch-settable ID

PWR: (1) Green LED, illuminates when DC power is applied to the NET port

NET: (1) Yellow LED, indicates communication with the control processor

RESET: (1) Recessed miniature pushbutton, resets internal processor

Enclosure

Light gray polycarbonate housing with polycarbonate label overlay, UL94 V-0 rated, 35mm DIN EN 60715 rail mount, DIN 43880 form factor for enclosures with 45mm front panel cutout, occupies 6 DIN module spaces (108mm)

Power Requirements

Cresnet Power Usage: 1.5 Watts (0.06 Amps @ 24 Volts DC)

Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 5 BTU/hr

Dimensions

Height: 3.71 in (9.42 cm)

Width: 4.18 in (10.60 cm)

Depth: 2.35 in (5.95 cm)

Weight

5.9 oz (165 g)


Available Models

DIN-I08: DIN Rail Versiport Module

DIN-IO8 DIN Rail Versiport Module

Typical DIN-IO8 Application

DIN-IO8 Example Application

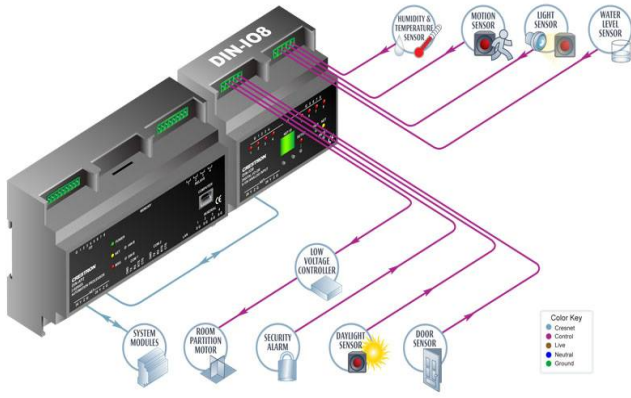

DIN-I08 DIN Rail Versiport Module

