



## BenQ DLP Projector

## TK710STi

### Feature High Light

- \* Great Native FOFO Contrast of min. 1350:1
- \* 1.2x big zoom with short-throw rate 0.69~0.83(95"±3% @ 1.44m) for easy installation
- \* The wider color gamut coverage rate of Rec.709 95%
- \* 2K resolution for better gaming experience
- \* Built-in QS02 with Netflix

### Display

Projection System	DLP
Native Resolution	0.65" 4K UHD
Brightness	MKT 3200lm
Native Contrast Ratio (FOFO)	min. 1350:1 (Bright mode)
Display Color	1.07 Billion Colors
Rec.709 Coverage	95%
Native Aspect Ratio	16:09
Light Source	Laser + LED
Light Source Life (Normal/Eco)*	20000 / 30000 hours

### Optical

Throw Ratio	0.69~0.83(95"±3% @ 1.44m)
Zoom Ratio	1.2±2%
Lens	F/#=2.53~2.73, F=10.2~12.24
Lens Shift	NA
Keystone Adjustment	3D keystone, Vertical & Horizontal & Rotation ± 30 degrees
Projection Offset	102.5%± 2.5%
Image Size	Wide:60"~120", Tele:60"~100"

### Picture

Picture Mode	Bright / Living room / RPG / FPS / Cinema / User / (3D) / (HDR-RPG) / (HDR-FPS) / (HDR10) / (HDR-User) / (HLG)
--------------	--

### Audio

Speaker	5W treVolo x1
---------	---------------

### Compatibility

Resolution Support	VGA(640 x 480) to 4K UHD(3840x2160)
Horizontal Frequency	15K~135KHz
Vertical Scan Rate	23~240Hz
HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p, 2160p

### Power

Power Consumption	275 W (Max); < 0.5 W (Standby)
Standby Power Consumption	< 0.5W
Power Supply	AC 100 to 240 V, 50/60 Hz

### Dimension and Weight

Product Dimensions (WxHxD)	304.2 x 253.5 x 112.4mm (include Adj foot)
Product Weight	3.1 Kg +/- 100g

### Operation Condition

Acoustic Noise (Normal/Eco2/Eco) (dB)	Normal: 34dBA(typ.)(Bright) Normal: 31dBA(typ.)(others mode)~TBD by EVT2 Eco: 28dBA(typ.) *Eco is Normal 70% light source power *noise:XPR on+1Dba *Noise without SWF
Operating Temperature	0~40°C

### Accessories

Accessories (Standard)	Power Cord Quick Start Guide User Manual E-edition Remote Control Warranty Card Regulatory Statements ATV dongle(QS02)
------------------------	--

Accessories (Optional)	NA
------------------------	----

### OSD


On Screen Display Language	English / Français / Deutsch / Italiano / Español / Русский / 繁體中文 / 简体中文 / 日本語 / 한국어 / Svenska / Nederlands / Türkçe / Čeština / Português / ភាសាខ្មែរ / Polski / Norsk / suomi / Indonesian / العربية / हिन्दी (22 Languages)
----------------------------	---

### Environment Notice

- \*LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications.
- \*All related Optical Value is measure by Standard Lens.
- \* The Contrast is measure by Full On Full Off standard.



## Connectivity

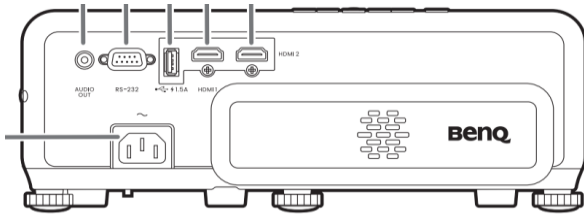

	Quantity
1 HDMI(HDCP2.2)	2
2 HDMI(HDCP2.2)(Hidden)	1
3 USB Type A (1A power supply)	1
4 Micro USB(Hidden)	1
5 RS232	1
6 Audio Out	1



## Dimension & Installation

### Dimensions

304.2 mm (W) x 253.5 mm (D) x 112.4 mm (H)

304.2 x 253.5 x112.4mm (include Adj foot)

3.1 Kg +/- 100g

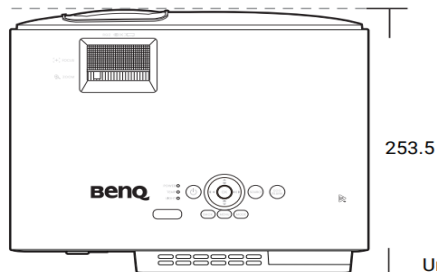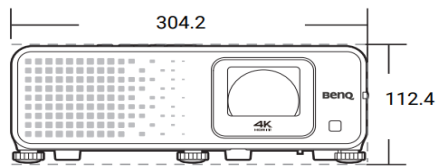

Unit: mm