



KRAMER ELECTRONICS LTD.

USER MANUAL

MODEL:

VP-771

Presentation Switcher/Scaler

P/N: 2900-300096 Rev 5




VP-771 Quick Start Guide

This guide helps you install and use your product for the first time. For more detailed information, go to http://www.kramerelectronics.com/support/product_downloads.asp to download the latest manual or scan the QR code on the left.

Step 1: Check what's in the box

- The **VP-771** Presentation Switcher/Scaler
- IR remote control transmitter with batteries
- 1 Power cord
- 1 Quick start guide
- 1 Set of ear racks
- 4 Rubber feet




Save the original box and packaging materials in case you need to return your product for service.

Step 2: Install the VP-771

Mount the machine in a rack or place on a table.


Step 3: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your **VP-771**.

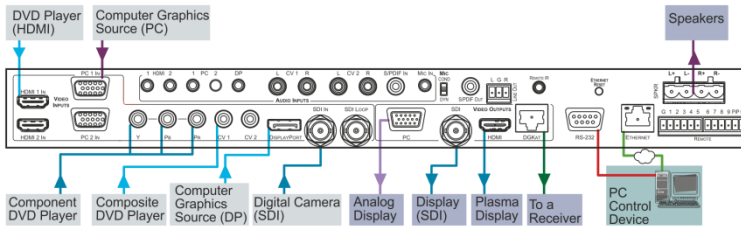

For best results, we recommend that you always use Kramer high-performance cables to connect AV equipment to the **VP-771**. For optimum range and performance use Kramer's **BC-DGKat524**, **BC-DGKat623** and **BC-DGKat7a23** cables. These specially built cables significantly outperform regular CAT 5, CAT 6, and CAT 7a cables.


Twisted Pair Pinout

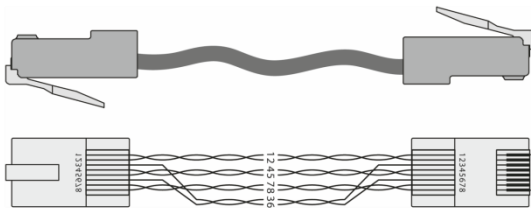

EIA / TIA 568B	
PIN	Wire Color
1	Orange / White
2	Orange
3	Green / White
4	Blue
5	Blue / White
6	Green
7	Brown / White
8	Brown


Step 4: Connect the power

Connect AC power to the rear of the **VP-771**, switch on its power and then switch on the power on each device.



Step 5: Set operation parameters via OSD menu


Enter the OSD menu via the MENU button on the front panel or the IR remote control transmitter. Select a menu item and set parameters as required.



Step 6: Operate via the front panel buttons and the remote control transmitter

If you cannot see any images, verify that the output cable to your display, TV, or projector is in good working order and is connected to the **VP-771**.
If you still don't see an image, press and hold the **RESET TO XGA/720P** button for 2 seconds to reset the output to XGA or 720p resolution.


Power save mode ON/OFF

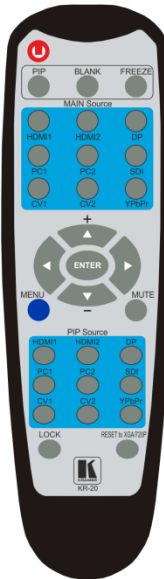

Press one of the 9 INPUT (MAIN Source) buttons to select an input signal



The MENU button shows the main OSD menu. The arrow buttons and ENTER button let you navigate within the OSD menu




Press the PIP button (to access the PIP mode) and then press one of the 9 INPUT (PIP Source) buttons to select the PIP window

Press and hold to reset to the default resolution (helpful if you fail to see the input signal on the display)




Step 7: Select an input via the contact closure remote control pins

To select input 3, momentarily connect the 3 PIN to the G PIN



To select PIP input 8, momentarily connect the 8 PIN to the G PIN and the PIP PIN to the other G PIN



Contents

1	Introduction	1
2	Getting Started	2
2.1	Achieving the Best Performance	2
2.2	Safety Instructions	2
2.3	Recycling Kramer Products	3
3	Overview	4
3.1	HDCP Compliance	7
3.2	About the Power Connect™ Feature	7
3.3	Using Twisted Pair Cable	7
3.4	Defining the VP-771 Presentation Switcher/Scaler	7
4	Installing in a Rack	11
5	Connecting the VP-771	12
5.1	Wiring the TP LINE IN / LINE OUT RJ-45 Connectors	15
5.2	Microphone Pinout	16
5.3	Audio Input Pinout	16
6	The OSD Menu	17
6.1	OSD Menu Operation Example	17
6.2	The Input Menu	20
6.3	The Audio Menu	27
6.4	The Process Menu	33
6.5	The Picture Menu	34
6.6	The Enhance Menu	35
6.7	The Scale Menu	36
6.8	The Miscellaneous Menu	39
7	The Display Modes	45
7.1	The Single Window Display Mode	45
7.2	The Dual Window Display Mode	45
8	Controlling the VP-771	50
8.1	Controlling via the Front Panel Buttons	50
8.2	Controlling via the OSD Menu	51
8.3	Controlling via the VP-771 Web Pages	51
8.4	Controlling the VP-771 via the REMOTE Terminal Block Connector	54
8.5	Controlling via the Infrared Remote Control Transmitter	56
9	Port Tunneling	58
10	Flash Memory Upgrade	60
11	Technical Specifications	61
11.1	Default Communication Parameters	62
11.2	Input Resolutions	62
11.3	Output Resolutions	64
12	The VP-771 RS-232 Communication Protocol	65
12.1	Using the Communication Protocol	65
12.2	Communication Protocol Mimicking OSD	65
12.3	Protocol Table: Mimicking Remote and Front Panel Buttons	75
12.4	The Protocol 3000 Common Operation Commands	75

Figures

Figure 1: VP-771 Presentation Switcher/Scaler Front Panel	8
Figure 2: VP-771 Presentation Switcher/Scaler Rear Panel	9
Figure 3: 15-pin HD Connector Pinout	12
Figure 4: Connecting the VP-771 Presentation Switcher/Scaler	14
Figure 5: TP PINOUT	15
Figure 6: Microphone Pinout	16
Figure 7: Audio Input Pinout	16
Figure 8: Input Menu	20
Figure 9: Select the Display Mode	22
Figure 10: Changing the Size of the Window	23
Figure 11: Increasing the Width	24
Figure 12: Increasing the Height	24
Figure 13: Positioning the Window	25
Figure 14: Window Customization	25
Figure 15: H-Position Slide Bar	26
Figure 16: Moving the PiP Window	26
Figure 17: Audio Menu	27
Figure 18: Set the Output Volume Level	28
Figure 19: SDI Channeling Example	29
Figure 20: The SDI Channeling Menu	30
Figure 21: SDI Channeling Example	31
Figure 22: SDI bypassed Channels Menu	32
Figure 23: Process Menu	33
Figure 24: Picture Menu	34
Figure 25: Enhance Menu	35
Figure 26: Scale Menu	36
Figure 27: Misc Menu	39
Figure 28: XML File Transfer	42
Figure 29: Emergency Alert System Display	43
Figure 30: CV1 superimposed over DP	48
Figure 31: Entering the IP Number in the Address Bar	51
Figure 32: Local Area Connection Properties Window	53
Figure 33: Internet Protocol (TCP/IP) Properties Window	53
Figure 34: Connecting the Contact Closure Remote Control PINs	54
Figure 35: Connecting the PiP Contact Closure Remote Control PINs	55
Figure 36: Infrared Remote Control Transmitter	56
Figure 37: Port Tunneling	58

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront video, audio, presentation, and broadcasting professionals on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 11 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Routers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters and GROUP 11: Sierra Video Products.

Congratulations on purchasing your Kramer **VP-771** Presentation Switcher/Scaler. This product, which incorporates HDMI™ technology, is ideal for:

- Projection systems in conference rooms, boardrooms, auditoriums, hotels and churches, production studios, rental and staging
- Any application where high quality conversion and switching of multiple and different video signals to graphical data signals is required for projection purposes

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual



Go to http://www.kramerelectronics.com/support/product_downloads.asp to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).

2.1 Achieving the Best Performance

To achieve the best performance:

- Use only good quality connection cables (we recommend Kramer high-performance, high-resolution cables) to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Do not secure the cables in tight bundles or roll the slack into tight coils
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality
- Position your Kramer **VP-771** away from moisture, excessive sunlight and dust



This equipment is to be used only inside a building. It may only be connected to other equipment that is installed inside a building.

2.2 Safety Instructions



Caution: There are no operator serviceable parts inside the unit

Warning: You use only the power cord that is supplied with the unit. Do not open the unit. High voltages can cause electrical shock! Servicing by qualified personnel only.

Warning: Disconnect the power and unplug the unit from the wall before installing

2.3 Recycling Kramer Products

The Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC aims to reduce the amount of WEEE sent for disposal to landfill or incineration by requiring it to be collected and recycled. To comply with the WEEE Directive, Kramer Electronics has made arrangements with the European Advanced Recycling Network (EARN) and will cover any costs of treatment, recycling and recovery of waste Kramer Electronics branded equipment on arrival at the EARN facility. For details of Kramer's recycling arrangements in your particular country go to our recycling pages at <http://www.kramerelectronics.com/support/recycling/>.

3 Overview

The Kramer **VP-771** is a high quality presentation switcher and scaler. It accepts one of nine inputs: a component video on RCA connectors, a DisplayPort (DP) signal on a DisplayPort connector, an SDI signal on a BNC connector, two computer graphics signals on 15-pin HD connectors, two composite video signals on RCA connectors, and two HDMI signals on HDMI connectors. It scales the video, embeds the audio, and simultaneously outputs the signal as follows: to the HDMI output, to the computer graphics output, to the SDI output and to a DGKat TP output, together with a digital audio output and an unbalanced stereo audio output.

COMPONENT VIDEO is also known as Y, Pb, Pr, or Y, Cb, Cr or YUV; compatible with both SD and HD component

The **VP-771** Presentation Switcher / Scaler features:

- PixPerfect™ Scaling Technology – Kramer’s precision pixel mapping and high quality scaling technology. High-quality 3:2 and 2:2 pull down de-interlacing and full up and down scaling of all video input signals
- State-of-the-art video processing technology, with the highest quality de-interlacing, noise reduction, and scaling performance for both standard-definition and high-definition signals
- K-IIT XL™ Picture-in-Picture Image Insertion Technology - Ultra stable picture-in-picture, picture-and-picture and split screen capability, or fully customizable windows’ size and position control: any source can be inserted into or positioned next to any other source and resized as desired
- Ultra Fast Fade-Thru-Black (FTB™) Switching - Video switching transitions are clean and ultra-fast. The video fades to black and the new input fades from black for smooth, glitch-free switching. The output signal provides constant sync so the display never glitches
- An emergency alert system that can have a national or campus-wide notification immediately displayed when an emergency situation develops, by means of automatic text overlaying, either via a crawler or a full screen cover up, as well as an optional audio alert
- Port tunneling, bidirectional RS-232 interface – simple control commands and data can flow in both directions from a controller to the **VP-771** via the Ethernet, allowing status requests and control of the destination unit

- Advanced deinterlacing functions - including 3D comb filtering, film mode, diagonal correction and motion detection
- Scaled Outputs - HDMI, computer graphics, SDI output and a DGMKAT TP output simultaneously
- Output Resolutions – HDTV and Computer Graphics up to 2K and 1080p/UXGA with selectable refresh rates
- Multiple Aspect Ratio Selections – Follow input, follow output, best fit, letterbox
- Multi-Standard SDI support - SDI (SMPTE 259M), HD-SDI (SMPTE 292M) and 3G HD-SDI (SMPTE 424M)
- Max. Data Rate - 3Gbps (3G HD-SDI).
- Looping 3G HD-SDI Input
- SDI channeling, letting you select one active audio signal and three bypassed signals from eight embedded stereo audio channels
- Multi-Standard Video support - NTSC (3.58/4.43), PAL (M/N/60) and SECAM
- Built-in Time Base Corrector - Stabilizes unstable video sources
- Built-in Proc-Amp with enhanced functions such as color correction, gamma and dither
- Input and output audio level adjustment
- Unbalanced microphone input (48V phantom power)
- Digital (S/PDIF) and unbalanced stereo audio inputs and outputs, with microphone talkover or microphone mix
- A built-in 2x10W power amplifier with speaker outputs on a 4-pin terminal block connector
- Automatic detection and selection of the HDMI and DP embedded audio. The **VP-771** automatically outputs the signal from the HDMI and DP embedded audio inputs or performs an analog takeover to output the respective analog audio input
- Selectable Power Save modes for energy efficient usage
- HDCP Compliant - The HDCP (High Definition Content Protection) license

agreement allows copy-protected data on the HDMI input to pass only to the HDMI output

In addition, the **VP-771** Presentation Switcher / Scaler:

- Includes luma keying via the PiP window
- Features advanced EDID management (native resolution and color depth) per input
- Analyzes the connected output's EDID for optimal scaling
- Auto-positions the input to fit the window perfectly
- Supports picture zooming both on main and PiP window from 100% to 1600%, including separate V and H sharpness control
- Provides input and output color space control
- Supports HDMI deep color for inputs and output
- Features vertical Keystone operation
- Features selectable test patterns
- Comes with an On-Screen Display (OSD) for easy setup and adjustment, accessible via the IR remote control and via the front-panel buttons
- Has a non-volatile memory that retains the last settings used for each input and window combination
- Supports firmware upgrade via RS-232 and Ethernet
- Is HDTV and computer graphics compatible and the resolution can be up- or down-scaled as required (see output resolutions in [Section 6.7](#))

Control your **VP-771**:

- Directly, via the front panel push buttons
- By RS-232 serial commands transmitted by a touch screen system, PC, or other serial controller
- Remotely, from the infrared remote control transmitter
- Via contact closure remote control switching
- Via the Ethernet (optionally via the Web pages)

The **VP-771** is housed in a 19" 1U rack mountable enclosure, with rack "ears" included, and is fed from a 100-240 VAC universal switching power supply.

3.1 HDCP Compliance



If an HDMI signal is HDCP protected, it can only appear on HDMI and DGKat outputs that are connected to HDCP compliant displays.

The **VP-771** will not output an HDCP protected source to a display that is not HDCP compliant. Instead it will show a black screen.

In the dual window display mode (see [Section 7.2](#)), even if only one of the inputs is HDCP protected, and is output to a non-compliant display, it will affect the entire screen and turn it black.

3.2 About the Power Connect™ Feature

The **VP-771** can power the receiver on the DGKat output when the devices are within 90m (270ft) of each other. The Power Connect™ feature applies as long as the cable can carry power and the distance does not exceed 90m on standard TP cable. For longer distances, heavy gauge cable should be used (TP cable is still suitable for the video/audio transmission, but not for feeding the power at these distances).

3.3 Using Twisted Pair Cable

Kramer engineers have developed special twisted pair cables to best match our digital twisted pair products; the Kramer: **BC-DGKat524** (CAT 5 24 AWG), the Kramer: **BC-DGKat623** (CAT 6 23 AWG cable), and the Kramer: **BC-DGKat7a23** (CAT 7a 23 AWG cable). These specially built cables significantly outperform regular CAT 5 / CAT 6 / CAT 7a cables.

3.4 Defining the VP-771 Presentation Switcher/Scaler

This section defines the **VP-771**.

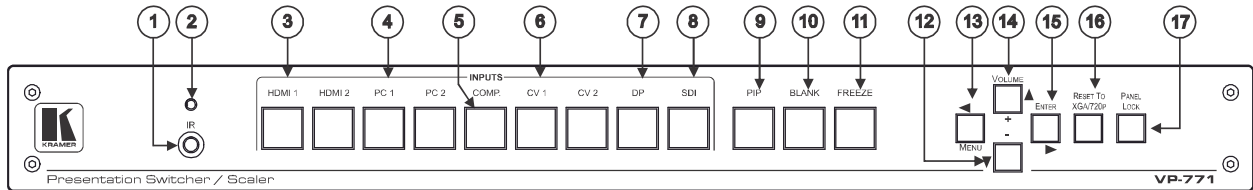


Figure 1: VP-771 Presentation Switcher/Scaler Front Panel

#	Feature	Function	
1	IR Receiver	Accepts IR remote commands	
2	IR LED	Lights red when the unit accepts IR remote commands	
3	INPUT Selector Buttons	HDMI	Press to select the HDMI input (from 1 to 2)
4		PC	Press to select the computer graphics input (from 1 to 2)
5		COMP.	Press to select the component video input
6		CV	Press to select the composite video input (from 1 to 2)
7		DP	Press to select the Display Port input
8		SDI	Press to select the SDI input
9	PIP Button	Toggles the dual window mode (Picture-in-Picture) function (see Section 7.2) Note that while browsing the OSD menu in the dual window mode, a long press of the PIP button will instantly toggle the window control (between Main and PIP)	
10	BLANK Button	Press to toggle between a blank screen (blue or black screen) and the display	
11	FREEZE Button	Press to freeze/unfreeze the output video image	
12	Navigation Buttons	▼/- Button	Press to move down the menu list (see Section 8.1.1) and to decrease numerical values. When not within the OSD menu mode, press to reduce the output volume
13		◀/MENU Button	Press to access the OSD menu, exit the OSD menu and, when in the OSD menu, move to the previous level in the OSD screen (see Section 8.1.1)
14		▲/+ /VOLUME Button	Press to move up the menu list values (see Section 8.1.1) and to increase numerical values. When not within the OSD menu mode, press to increase the output volume
15		▶/ENTER Button	Press to access sub-menu items and select from several settings (see Section 8.1.1)
16	RESET TO XGA/720P Button	Press to reset the video output resolution to XGA or 720p and change the deep color settings to Off on the output (see Section 6.7) Press and hold for about 3 seconds to toggle between reset to XGA and reset to 720p	
17	PANEL LOCK Button	Press and hold for about 3 seconds to lock/unlock the front panel buttons	

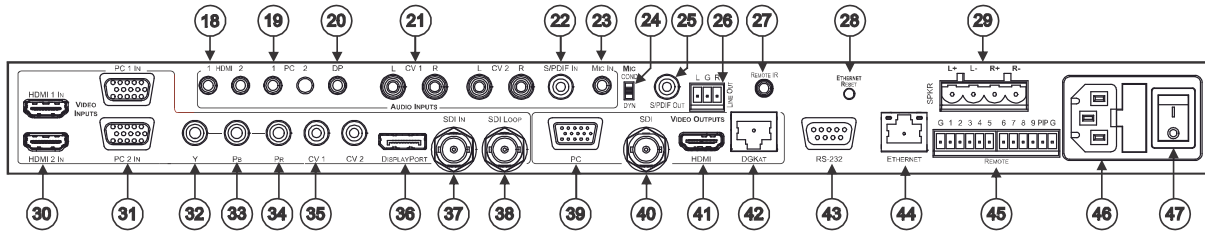


Figure 2: VP-771 Presentation Switcher/Scaler Rear Panel

#	Feature	Function
18	AUDIO IN Unbalanced Connectors	HDMI 3.5mm Mini Jack
19		PC 3.5mm Mini Jack
20		DP 3.5mm Mini Jack
21		CV (L, R) RCA
22		S/PDIF IN RCA
23		MIC IN 3.5mm Mini Jack
24	COND/DYN MIC DIP-switch	Select between a condenser and a dynamic type microphone
25	S/PDIF OUT RCA Connector	Connect to a digital audio acceptor
26	LINE OUT (L, R) Terminal Block Connector	Connect to the L and R unbalanced stereo audio acceptor
27	REMOTE IR 3.5mm Mini Jack (opening) Covered by a cap. The 3.5mm connector at the end of the internal IR connection cable fits through this opening	Connects to an external IR receiver unit for controlling the machine via an IR remote controller (instead of using the front panel IR receiver) Optional. Can be used instead of the front panel (built-in) IR receiver to remotely control the machine (only if the internal IR connection cable has been installed), see Section 8.5.1
28	ETHERNET RESET Button	Press while turning power off and then on, to reset the Ethernet settings to their factory default state
29	SPKR Terminal Block Connector	Connect to a balanced stereo audio acceptor (speakers)
30	VIDEO INPUT Connectors	HDMI
31		PC 15-pin HD
32		Y RCA
33		Pb RCA
34		Pr RCA
35	CV RCA	Connect all three connectors to the component video source
		Connect to the composite video source (from 1 to 2)

#	Feature	Function	
36	DISPLAYPORT	Connect to the DisplayPort source	
37	<i>SDI IN</i>	Connect to the SDI source	
38	<i>SDI LOOP</i>	Connect to a local display	
39	<i>PC 15-pin HD</i>	Connect to a computer graphics acceptor	
40	VIDEO OUTPUT Connectors	<i>SDI BNC</i>	Connect to an SDI acceptor
41		<i>HDMI</i>	Connect to an HDMI acceptor
42		<i>DGKAT RJ-45</i>	Connect to a DGKat receiver (for example, Kramer PT-572+)
43		<i>RS-232 9-pin D-sub Port</i>	Connect to the PC or other serial controller
44	<i>ETHERNET</i> Connector	Connects to the PC or other Controller through computer networking	
45	<i>REMOTE</i> Terminal Block Connectors	For remotely switching the inputs and PIP input via contact closure switches	
46	Power Connector with Fuse	AC connector, enabling power supply to the unit	
47	<i>POWER</i> Switch	Switch for turning the unit ON or OFF	

4 Installing in a Rack

This section provides instructions for rack mounting the unit.

Before installing in a rack, be sure that the environment is within the recommended range:

OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	-40° to +70°C (-40° to 158°F)
HUMIDITY:	10% to 90% RHL non-condensing




CAUTION!

When installing on a 19" rack, avoid hazards by taking care that:

1. It is located within the recommended environmental conditions, as the operating ambient temperature of a closed or multi unit rack assembly may exceed the room ambient temperature.
2. Once rack mounted, enough air will still flow around the machine.
3. The machine is placed straight in the correct horizontal position.
4. You do not overload the circuit(s). When connecting the machine to the supply circuit, overloading the circuits might have a detrimental effect on overcurrent protection and supply wiring. Refer to the appropriate nameplate ratings for information. For example, for fuse replacement, see the value printed on the product label.
5. The machine is earthed (grounded) in a reliable way and is connected only to an electricity socket with grounding. Pay particular attention to situations where electricity is supplied indirectly (when the power cord is not plugged directly into the socket in the wall), for example, when using an extension cable or a power strip, and that you use only the power cord that is supplied with the machine.

To rack-mount a machine:

1. Attach both ear brackets to the machine. To do so, remove the screws from each side of the machine (3 on each side), and replace those screws through the ear brackets.



2. Place the ears of the machine against the rack rails, and insert the proper screws (not provided) through each of the four holes in the rack ears.

Note:

- In some models, the front panel may feature built-in rack ears
- Detachable rack ears can be removed for desktop use
- Always mount the machine in the rack before you attach any cables or connect the machine to the power
- If you are using a Kramer rack adapter kit (for a machine that is not 19"), see the Rack Adapters user manual for installation instructions available from our Web site

5 Connecting the VP-771



Always switch off the power to each device before connecting it to your **VP-771**. After connecting your **VP-771**, connect its power and then switch on the power to each device.



You do not have to connect all the inputs and outputs, connect only those that are required.

To connect the **VP-771**, as illustrated in the example in [Figure 4](#), do the following:

1. Connect an HDMI source (for example, a DVD player) to the HDMI 1 IN VIDEO INPUT connector.

Alternatively, you can connect the DVI connector on the DVD player to the HDMI connector on the **VP-771** via a DVI-HDMI adapter. You can connect the audio signal via the AUDIO IN HDMI 3.5mm mini jack, or use the embedded audio

2. Connect a computer graphics source to the PC 1 IN VIDEO INPUT 15-pin HD connector.

Alternatively, you can connect a component (YPbPr) or RGBHV source via the 15-pin HD connector (available for PC1 IN only), see [Figure 3](#)

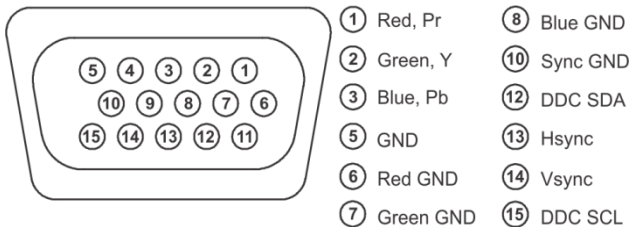


Figure 3: 15-pin HD Connector Pinout

3. Connect a component video source (for example, a component DVD player) to the COMP PR, PB and Y, VIDEO INPUT RCA connectors.
4. Connect a composite video source (for example, a composite video player) to the CV VIDEO INPUT RCA connector.
5. Connect a DisplayPort video source (for example, a computer graphics source) to the DISPLAYPORT connector.

6. Connect the audio input signals to the AUDIO IN connectors (3.5mm mini jack and RCA connectors), as required (not shown in [Figure 4](#)).
7. Connect an SDI source (for example, an SDI digital camera) to the SDI IN BNC connector.
8. Connect the SDI LOOP BNC connector to an SDI monitor (for example, an SDI display).
9. Connect the PC VIDEO OUTPUT 15-pin HD connector to a VGA acceptor (for example, an analog display).
10. Connect the SDI VIDEO OUTPUT BNC connector to an SDI acceptor (for example, an SDI display with speakers).
11. Connect the HDMI VIDEO OUTPUT connector to an HDMI acceptor (for example, a plasma display).
12. Connect the DGKAT RJ-45 connector to a receiver (for example, the Kramer **PT-572+**).
13. Connect the SPKR block connector to a pair of loudspeakers, by connecting the left loudspeaker to the “L+” and the “L-” terminal block connectors, and the right loudspeaker to the “R+” and the “R-” terminal block connectors. **Do not Ground the loudspeakers** (not shown in [Figure 4](#)).
14. If required, you can connect a PC and/or controller to the:
 - RS-232 terminal block (see [Section 8.3.2](#))
 - Ethernet connector (see [Section 8.3.3](#))
15. Connect the power cord (not shown in [Figure 4](#)).

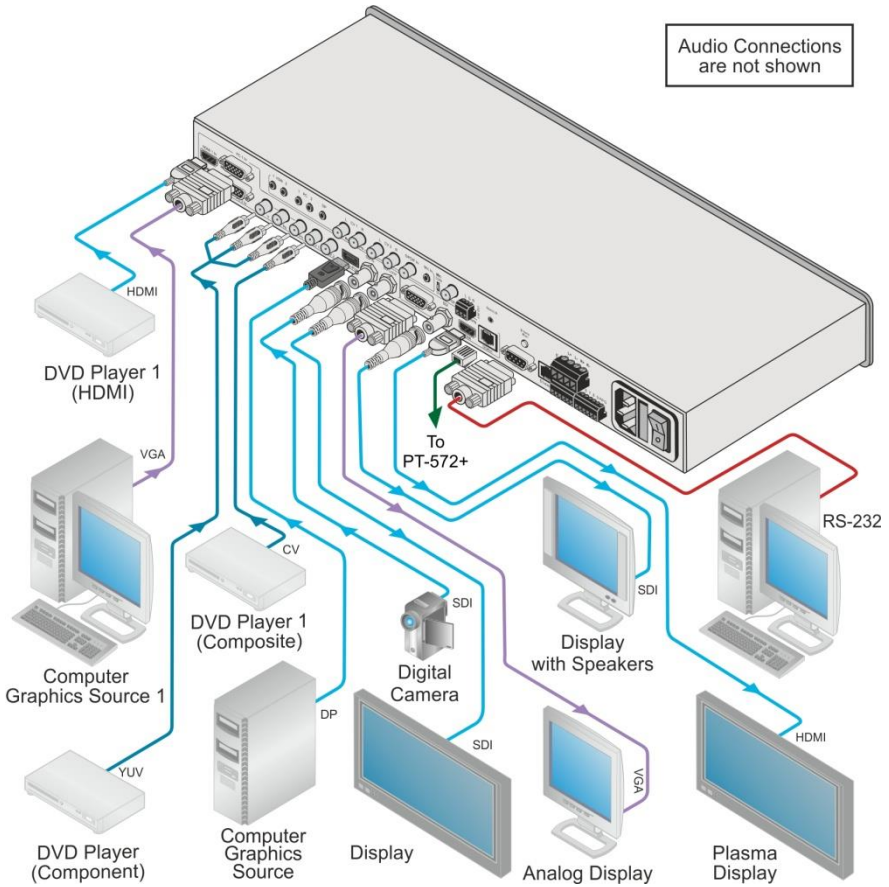


Figure 4: Connecting the VP-771 Presentation Switcher/Scaler

5.1 Wiring the TP LINE IN / LINE OUT RJ-45 Connectors


This section defines the TP pinout, using a **straight** pin-to-pin cable with RJ-45 connectors.



Note, that the cable Ground shielding must be connected / soldered to the connector shield.

EIA / TIA 568B	
PIN	Wire Color
1	Orange / White
2	Orange
3	Green / White
4	Blue
5	Blue / White
6	Green
7	Brown / White
8	Brown

Figure 5: TP PINOUT

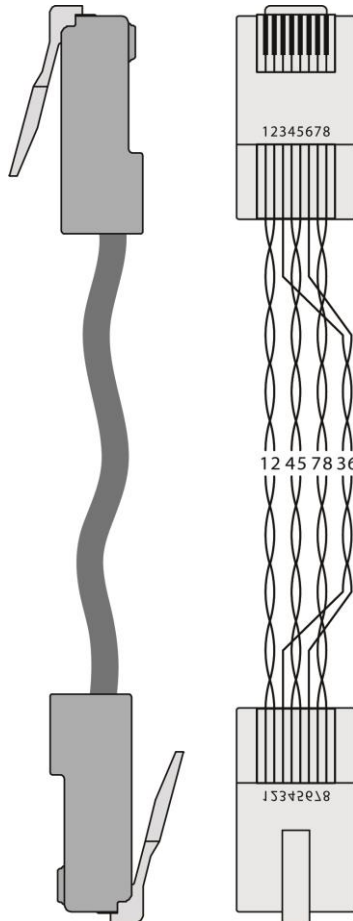

5.2 Microphone Pinout

This section defines the microphone 3.5mm jack pinout.

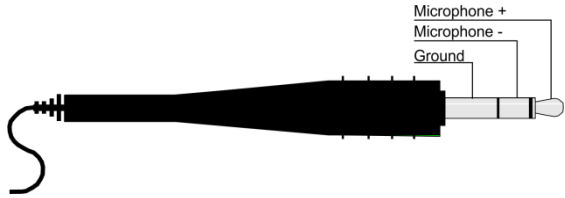


Figure 6: Microphone Pinout

5.3 Audio Input Pinout

This section defines the audio input 3.5mm jack pinout.

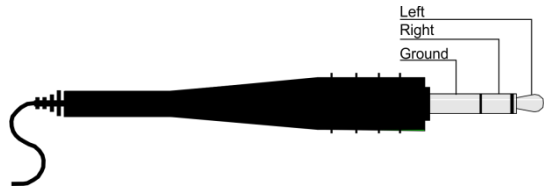


Figure 7: Audio Input Pinout

6 The OSD Menu

The **VP-771** OSD menu lets you set the operation parameters for the:

- Main Window Control
- PIP Window Control
- Entire System Control

The nature of the operation setup appears in the OSD title, as shown in the example in [Section 6.1](#):

- The title line shows the control mode (Main, PIP or Entire system)
- Level 1 lists the main menu items
- Level 2 includes the second hierarchy level, below level 1
- Level 3 includes the third hierarchy level, below level 2
- Function, is the selectable parameter or numerical value and can appear either under level 2 or 3

6.1 OSD Menu Operation Example


In the example illustrated below, the Master Connection is set to DGKat (see [Section 6.7](#)).

The table below shows function 632 (from the Protocol in [Section 12.2](#)):


- 6 in the hundreds, represents “Scale” which is the 6th menu item in the main menu list
- 3 in the tens, represents “Output” which is 3rd in the Scale menu
- 2 in the units, represents “Master Connection” which is second in the Output menu

Level 1	Level 2	Level 3	Level 4 (Function)	Range	Function
Scale (6)	Output (3)	Master Connection (2)	HDMI	0	632
			DGKat	1	
			PC	2	
			SDI	3	


The subtitle, below the title line shows the current level accessed (Scale in this example)

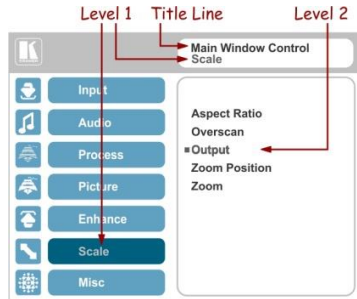

After selecting Output (which is the second Level), it appears in the subtitle

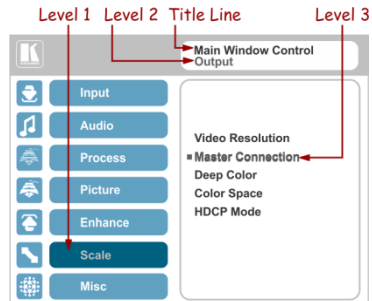

Once Master Connection is selected, the Title changes to "Entire System Control" indicating that the selection will affect the entire system. The subtitle shows the current, Level 3, selection and the menu list shows the function (DGKat)

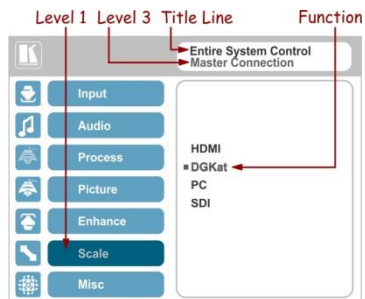

If the display layout includes a PIP window, you can set the OSD menu to control the main source window and the PIP window separately (by defining Window Control, see [Section 6.8](#)).

General characteristics which apply to the entire system (for example, setting the volume) are changed without needing to shift control (the title line will state: Entire System Control).

Note that:

- A selected parameter that turns gray becomes valid immediately. You can press Enter at this point to save these parameter changes to the memory immediately (the screen will display “Saving Data” for a split second).
- In any case, exiting the menu saves the parameter to the memory
- Data is saved per window and per input (to a dedicated input + window memory), as applicable

The control buttons let you control the **VP-771** via the OSD menu. Press the:

- MENU (or <) button to enter the menu, exit the menu, and when in the OSD menu, move to the previous level and change menu settings in the OSD screen.

Changes are immediate

The default timeout is set to 30 seconds and can be changed (see [Section 6.8](#))

- ENTER (or >) button to access sub-menu items
- Arrow buttons to move through the OSD menu
- Up or down arrows to change settings



Note that when exiting the menu, all the changes are automatically saved to the non-volatile memory.

The default OSD timeout for auto exit is set to 30 seconds and can be changed (see [Section 6.8](#)).

6.1.1 OSD Control Icons

The following three icons: **M**, **P**, and **E** are included to indicate when functionality applies to the Main window, the PiP Window or the entire system:

- **M** for Main Window Control
- **P** for PiP window Control
- **E** for Entire System Control

6.2 The Input Menu

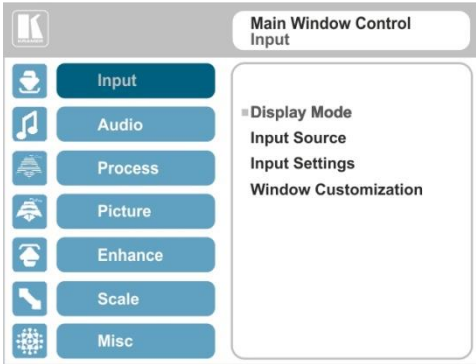







Figure 8: Input Menu

Setting	Function
Display Mode	<p>Select the display mode (see Figure 9):</p> <p>Single Window – single window mode operation with one channel displayed </p> <p>Picture in Picture (PiP) – dual window mode operation, a smaller window superimposed over a full screen image (see Section 7.2) </p> <p>Picture + Picture (PoP) – dual window mode operation, both images appear side-by-side and the aspect ratios of both images are maintained (see Section 7.2) </p> <p>Split (SbS) – dual window mode operation, both images are placed side-by-side with the same height (see Section 7.2) </p> <p>When selecting the dual window mode, set the Main window or the PiP window parameters via Misc -> OSD -> Window Control (see Section 6.8)</p> <p>Note that while browsing the OSD menu in the dual window mode, pressing the PiP button will instantly toggle the window control (between Main and PiP)</p> <p>Customized – customized image size </p> <p> Note that any change in the output resolution may cause disproportion or even cancel the window customization.</p>
Input Source	<p>Select the input source: HDMI1, HDMI2, PC1, PC2, COMP, CV1, CV2, DisplayPort or SDI </p> <p> Note that any change in the input source may cancel the freeze and blank settings.</p>

Setting	Function
Input Settings	<p>Set the:</p> <p>H Image Shift – to set the horizontal position of the image within the window  Volatile parameter</p> <p>V Image Shift – to set the vertical position of the image within the window  Volatile parameter</p> <p>Auto Positioning – to search the input image during the tuning process and automatically position it on the output window in a perfect fit. Set to Off to disable auto positioning Set to Normal Scan to perform a normal range image search Set to Wide Scan to perform a wide range image search </p> <p>In the Normal/Wide Scan option, the machine automatically adjusts the PC (PC 1 and PC 2) and DP input video resolutions. For the other inputs, the machine automatically adjusts all the input video resolutions except for HD/SD (CEA 861 standard) video resolutions</p> <p>HDCP Mode – to select the HDCP option for the HDMI input: either ON (the default) or OFF. Setting HDCP mode to Off on the HDMI input allows the source to transmit a non-HDCP signal if required (for example, when working with a Mac computer).</p> <p>EDID Select – to select the native resolution on each input (HDMI, DP and VGA inputs) to be read by the video source connected to that input: 1024x768@60, 1280x800@60, 1280x1024@60, 1366x768@60, 1440x900@60, 1400x1050@60, 1600x900@60, 1600x1200@60, 1680x1050@60, 1920x1200@60RB, 720p50, 720p60, 1080p50, 1080p60, 2K50 or 2K60 Note that for the HDMI and DP inputs, you can either select the color depth to be 8bpp or 12bpp after selecting the native resolution</p> <p> Note that when the EDID is set on the inputs, the changes are per input and immediate for PC 1, PC 2 and DP inputs. Setting the EDID on any one of the HDMI inputs affects that HDMI input immediately (the VP-771 automatically issues a hot-plug) and will affect the other HDMI video source only after a hot-plug occurrence on that input. For example, if the EDID is selected for HDMI2 it will affect the HDMI2 input immediately; the HDMI1 EDID will take effect following a hot-plug.</p> <p>Color Space – to select the color space for the PC and HDMI inputs: RGB, YPbPr or Follow Input Note that if the machine is set to the dual display mode, and both the Main and PiP windows display the same input, you need to set the same input color space value for both windows</p>

Setting	Function
Window Customization	<p>Select the position and the size of the selected window: H Position, H Width, V Position and V Height (see Section 6.2.1.2 and Section 6.2.1.1) W/P</p> <p>The value range is dynamic. The FW prevents windows from exceeding the boundaries or over-sizing. The position and size of the windows are saved to the system.</p> <p>The size and position of the customized window (Main or PiP) remain valid even when toggling the PiP button (front panel, remote control transmitter or protocol command).</p> <p>The customized setup is cancelled only by explicitly selecting a preset Display Mode (see first item in this table) or if a new customized setup is created.</p> <p>Use the front panel + and – buttons, IR remote control transmitter or Web page to set the position and height of the Main and/or PiP windows</p> <p> The PiP window maximum horizontal active image area is 1600 pixels</p>

The display mode setup, shown in [Figure 9](#), is part of the entire system control and the selected Single Window also shows the current aspect ratio (Best Fit):



Figure 9: Select the Display Mode

6.2.1 Window Customization

Window customization lets you change the size and position of a selected window. Make sure that you have control over the window that requires customization (Main Window Control or PiP Window Control). If not, select it via the OSD item in the Miscellaneous menu, see [Section 6.8](#).

In the following examples, PiP Window Control is selected, but the same procedure applies to Main Window Control.



Note that you can also customize the window size and position via the “Y” commands (see [Section 12.2](#)) or protocol 3000 (see [Section 12.4](#)).

6.2.1.1 Changing the Size of the Main and/or PiP Window

Use the H Width and V Height to change the size of the window using the + and – buttons on the front panel or remote control transmitter (as illustrated in [Figure 10](#)).

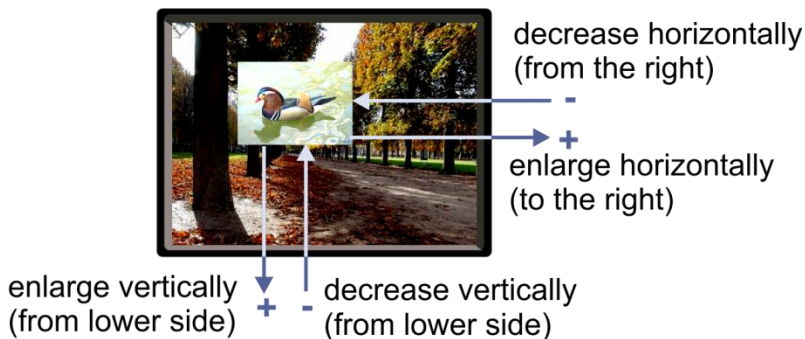


Figure 10: Changing the Size of the Window

To change the size of the window, do the following:

1. Check that window control is set as required (for example, PiP Window Control).
2. Select Window Customization (see [Figure 14](#)).
3. Select H width (an OSD slide bar appears) and press + to increase the width, or – to decrease the width, see [Figure 11](#).

The following example shows how to increase the width of the window

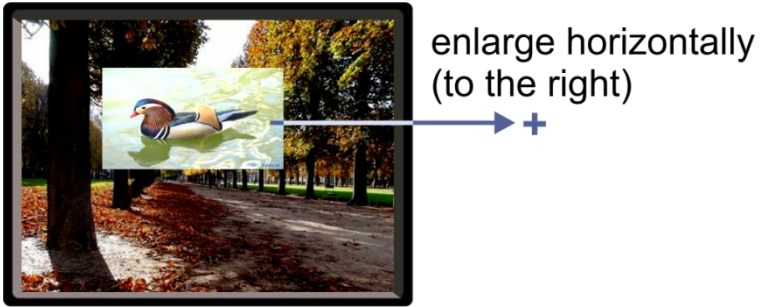


Figure 11: Increasing the Width

4. Select V Height (an OSD slide bar appears) and press + to increase the height, or – to decrease the height, see [Figure 12](#).

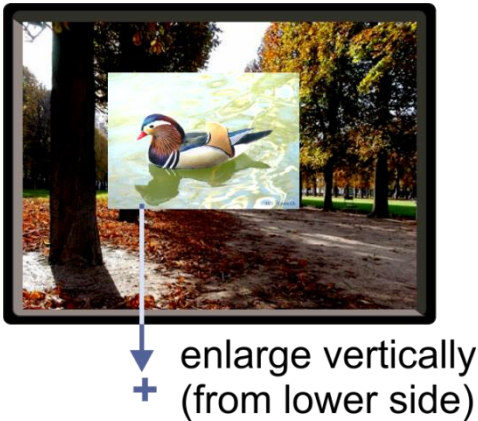


Figure 12: Increasing the Height

6.2.1.2 Moving the Position of the Main and/or PiP Window

Use the H Position and V Position items in the OSD to change the position of the window using the + and – buttons on the front panel or remote control transmitter (as illustrated in [Figure 13](#)).

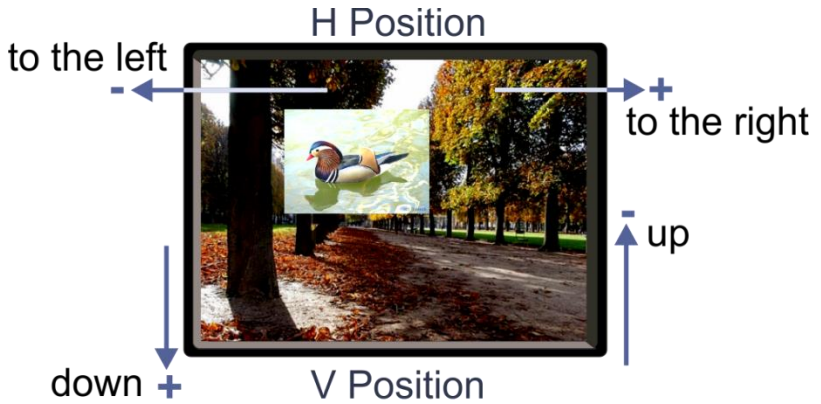


Figure 13: Positioning the Window

To move the position of the window, do the following:

1. Check that window control is set as required (for example, PiP Window Control).
2. Select Window Customization.

The following Window appears:

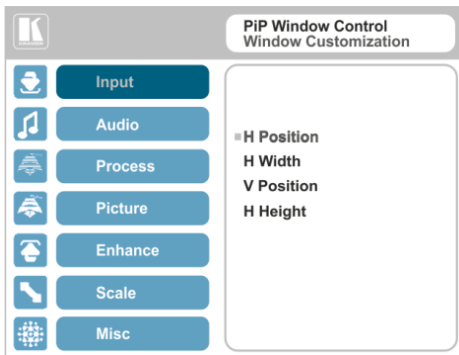


Figure 14: Window Customization

3. To move the picture to the right, select H Position.
An OSD slide bar appears:

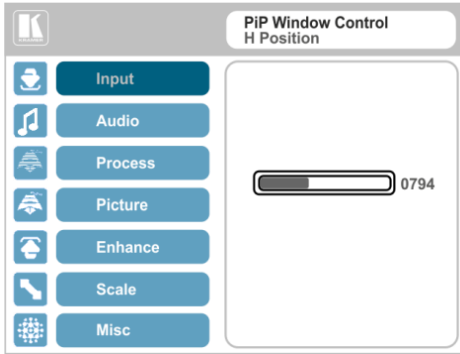


Figure 15: H-Position Slide Bar

4. Press the +/- buttons to move the PiP window horizontally. Use the V Position menu item in the same way to move the PiP vertically, see [Figure 16](#).

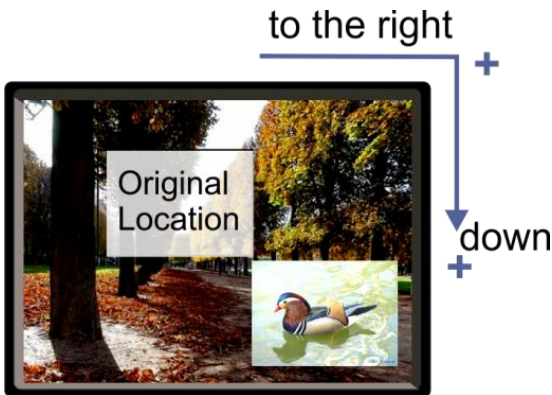


Figure 16: Moving the PiP Window



Note that the sequence in which you change the size and position of the window is insignificant, as long as you make sure that the resized image does not go beyond the window boundaries.

6.3 The Audio Menu

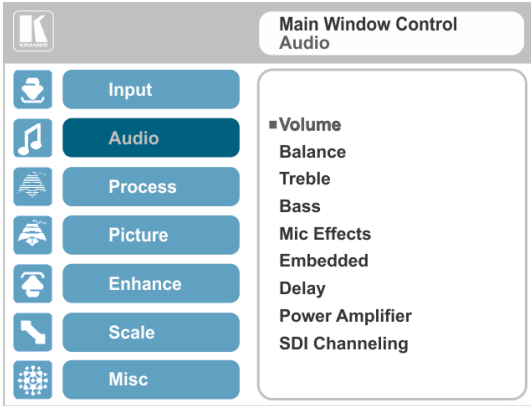


Figure 17: Audio Menu

Setting	Function
Volume	<p>Set the input/output volume level [dB], see Figure 18. Set the:</p> <p>Input Volume [dB] – to adjust the audio input level</p> <p>Output Volume [dB] – to adjust the audio output level</p> <p>The output audio level can also be set via the + and – buttons on the front panel buttons (when not in the OSD mode) and/or the IR remote control transmitter buttons (see Section 8.5)</p> <p>Mic Volume [dB] – to adjust the Microphone audio level</p>
Balance	Set the balance [ratio]
Treble	Set the treble [dB]
Bass	Set the bass level [dB]
Mic Effects	<p>Set the:</p> <p>Mic Talkover Depth [%] – to determine the decrease of the audio level during microphone takeover (press + to further decrease the talkover audio output level; press – to lessen the talkover output audio decrease level)</p> <p>Mic Talkover Trigger [dB] – to determine the microphone threshold level that triggers the audio output-level decrease</p> <p>Mic Mix [dB] –set to 1 to enable the Talkover mode or set to any other value to decrease the Mic volume without changing the Line out volume level. In the Mix mode, set the</p> <p>Line Mix [dB] – to decrease of the line out volume level without changing the Mic volume level</p> <p>The microphone input can be output along with the audio output in the Talkover (default) mode or the Mix mode, separately or together. In the Talkover mode (Mic Mix is set to 1), the audio output volume level decreases when the microphone is used and it returns back to its original set level when the microphone input is inactive. In the Mix mode, the microphone input is mixed with the audio output at a set level. You can also set the Line Mix separately.</p>

Setting	Function
Embedded	<p>Set:</p> <p>Pass-through – to On to pass the digital audio input directly to the output without any processing or set to Off to process the digital audio input </p> <p> Note that this feature is disabled for the non-embedded audio inputs (PC, CV, YUV). In case the audio signal is encrypted or compressed set the Pass-through to On. Note that in some cases there may not be sufficient capacity to accurately transmit the audio.</p> <p>Analog Takeover – to On for the analog inputs of the HDMI and DP inputs to take over the embedded inputs; select Off to use the embedded inputs </p> <p>Analog takeover is available only if an unbalanced audio signal is connected (via 3.5mm connector). When set to On, the embedded audio is disabled as long as the 3.5mm cable is connected to the 3.5mm mini jack</p>
Delay	<p>Set:</p> <p>Lip Sync delay value [msec] </p> <p>Mic Delay value [msec] </p>
Power Amplifier	<p>Set the power amplifier (SPKR) level to Off or to levels 1 to 4 </p> <p>This submenu item is specific for the power amplifier, on top of the general volume level</p>
SDI Channeling	<p>Set the SDI channeling for groups A, B, C and D and connect the active and the bypassed channels (see Section 6.3.1)</p> <p>By default, groups A and B are connected and groups C and D are disconnected</p> <p>Set the SDI channeling for groups A, B, C and D to Activate CH1, Activate CH2 or Bypass. If other groups are set to Activate or Bypass, the remaining groups are read as None</p>

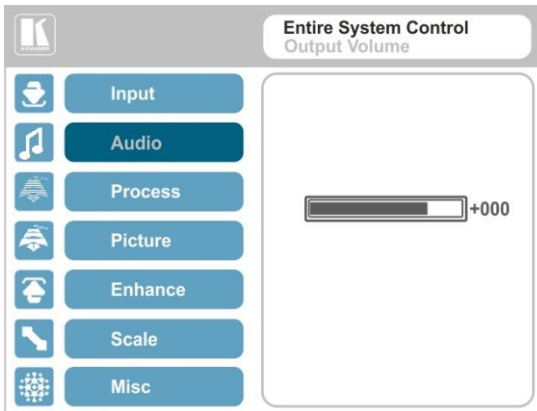


Figure 18: Set the Output Volume Level

6.3.1 SDI Channeling

SDI channeling includes four groups with two stereo channels each. Two of the groups are always connected and the other two disconnected. You can select (via

the OSD) one of the eight SDI embedded stereo audio channels, together with three bypassed channels, to be routed to the input of a connected machine with SDI audio channels (for example, the Kramer **6810HDXL** SDI/HD-SDI/3G Audio Embedder/De-embedder, or the Kramer **6809HD** HD/SD-SDI AES Embedder).



Within the two connected groups, one channel can be activated and the remaining three channels are bypassed. The acceptor device will input the channels as follows: the active channel is input as Group A, CH1; the bypassed channel in the same group is input as Group A, CH2; the two remaining bypassed channels are input as Group B CH1 and CH2.

In the example illustrated in [Figure 19](#), channels C and D are disconnected and channels A and B are connected (CH1 and CH2 in group A are bypassed, CH1 in group B is bypassed and CH2 in group B is active).

These channels are input to the Kramer **6810HDXL**, processed and output to an audio acceptor:

- The group B active CH2 signal is input as Group A, CH1
- The group B bypassed CH1 signal is input as Group A CH2
- The group A bypassed CH1 signal is input as Group B CH1
- The Group A bypassed CH2 signal is input as Group B CH2

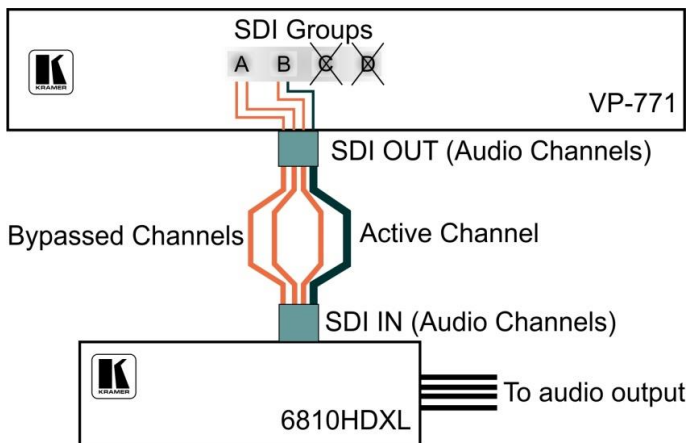


Figure 19: SDI Channeling Example

The active channel and bypassed channels are selected via the OSD menu.

[Figure 20](#) shows the SDI Channeling menu:

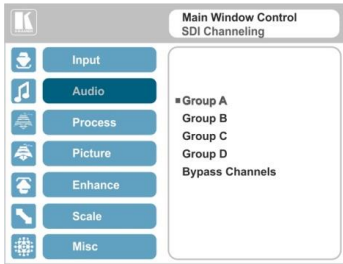


Figure 20: The SDI Channeling Menu

In the OSD setup that is illustrated in [Figure 21](#), CH 2 in group B (active), CH1 in group B as well as CH 1 and CH2 in group A (bypassed) are routed via the **VP-771** SDI output to the input of **6810HDXL**; groups C and D are disconnected and therefore read as None (see example in [Figure 19](#)).

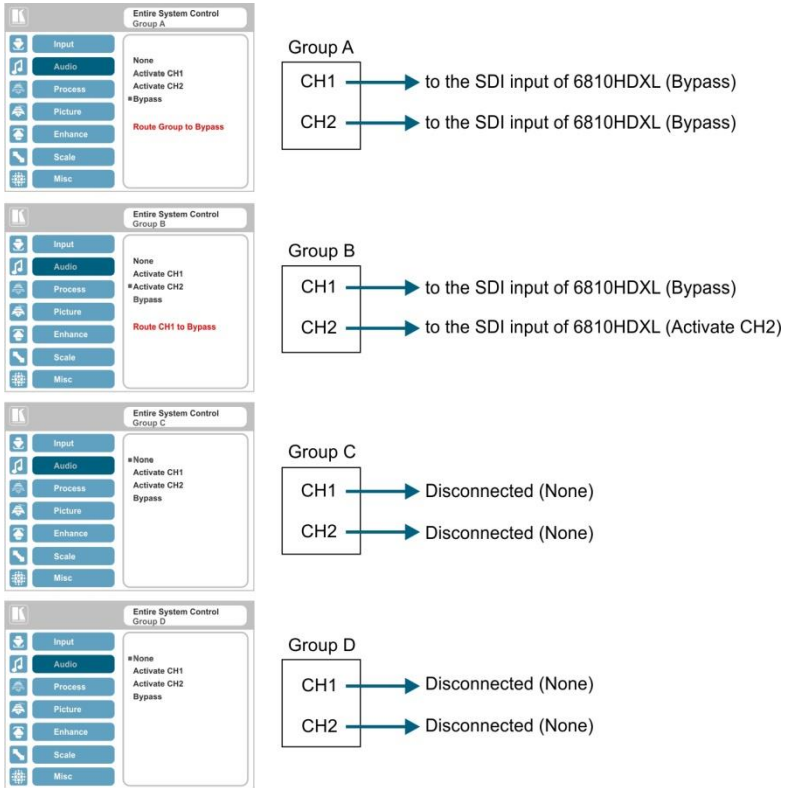


Figure 21: SDI Channeling Example

If a different channel within the connected groups is activated, the remaining three channels will be automatically routed to bypass.

If a channel in a disconnected group is activated, the system will automatically rearrange the groups and channel assignments to keep two groups connected and two others disconnected.

6.3.1.1 Bypassed Channels

Select Bypass channels to set the bypassed channels to mute to cutoff the bypassed audio channels or to Unmute to let them pass through:

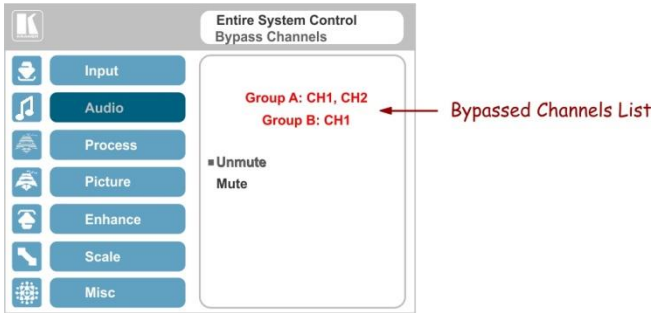


Figure 22: SDI bypassed Channels Menu

The Bypass Channels menu also lists the selected bypassed channels in the enabled groups.

6.4 The Process Menu



The Process menu functions are available for interlaced video processing only and not for progressive scan.

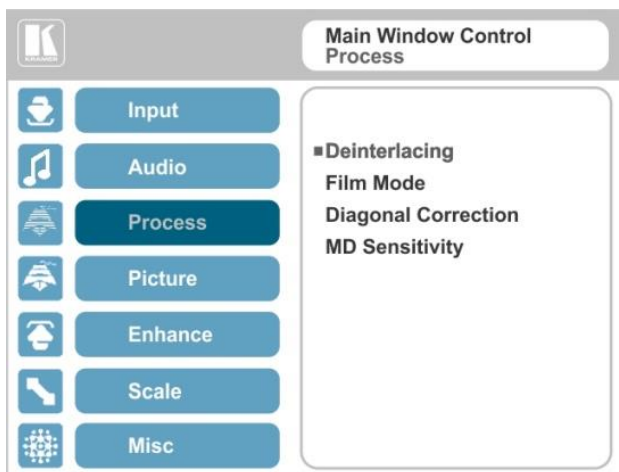


Figure 23: Process Menu

Setting	Function
Deinterlacing	<p>Set the deinterlacing method to:</p> <p>Line Doubler – reduces the flicker and improves the quality of the image to some extent M/P</p> <p>Line doubler takes an interlaced scan, doubles the lines. The additional lines provide a better quality image and a brighter output</p> <p>Motion adaptive – to produce a brighter smoother and higher resolution image M/P</p> <p>Set the deinterlacing (per window) sync to:</p> <p>Current Field – for a long delay M/P</p> <p>Older Field – for a short delay M/P</p> <p>When selecting Older Field, diagonal correction is disabled</p>
Film Mode	<p>Set to:</p> <p>Off – for no pull-down M/P</p> <p>Follow Input – to automatically identify the required pull-down (2:2 or 3:2 pull-down) M/P</p> <p>24PsF – to force 24PsF pull-down M/P</p>
Diagonal Correction	<p>Set the level of diagonal interpolation from 0 to 3.</p> <p>When set to the lower level, the diagonal image does not appear smooth M/P</p>
MD Sensitivity	<p>Set (from Level 1 to Level 5) M/P</p> <p>Select the motion detection sensitivity for filtering of interlaced images. Set a high value for video where there is generally a large amount of motion, or a low value for little motion</p>

6.5 The Picture Menu

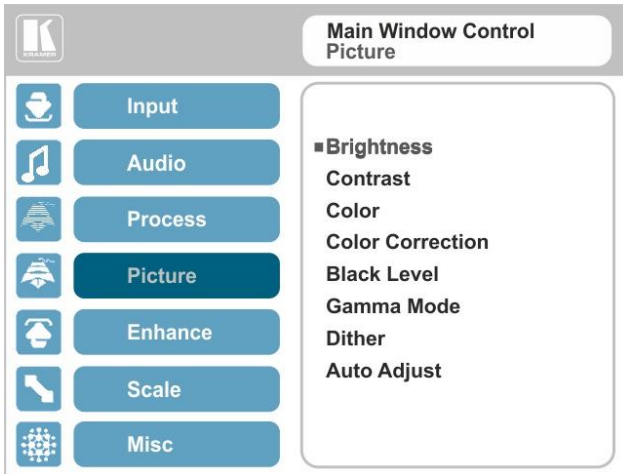


Figure 24: Picture Menu

Setting	Function
Brightness	Set the brightness level M/P
Contrast	Set the contrast level M/P
Color	Set the color level M/P
Color Correction	Set the blue, green and flesh color levels from 0 to 4 M/P
Black Level	Set the black level M/P
Gamma Mode	Set the gamma correction factor to Off, 0.4, 0.8, 1.2, 1.6, 2.0, 2.4 or 2.8 E The higher the value, the darker the image
Dither	Set the error diffusion E : Mode0: Disable error diffusion Mode1: In-frame 8:6 conversion Mode2: Intra-frame 8:6 conversion Mode3: In-frame 10:8 conversion Mode4: Intra-frame 10:8 conversion Mode5: In-frame 12:10 conversion Mode6: Intra-frame 12:10 conversion
Auto Adjust	Set the image color (back to its default values) and position per window (centers it correctly on the screen) M/P See Auto Positioning menu item in Section 6.2 Note that Auto Adjust is disabled when in the Freeze state

6.6 The Enhance Menu

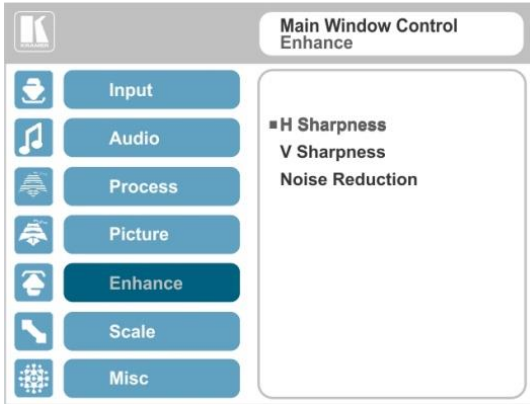



Figure 25: Enhance Menu





Setting	Function
H Sharpness	Select the horizontal sharpness level M/P
V Sharpness	Select the vertical sharpness level M/P
Noise Reduction	<p>Set the input noise reduction levels:</p> <p>Mosquito NR – the higher the level, the stronger the filtering of the image M/P</p> <p>Combing NR – set to improve the quality of the subtitles M/P</p> <p>Temporal NR – the higher the level, the stronger the filtering of the image. Useful when the noise is visible to the eye M/P</p> <p>Block NR – as the level is set higher, the block noise disappears and the image appears softer M/P</p> <p> Input noise reduction (except for Temporal NR) is enabled for interlaced video processing only and is inactive in the progressive scan.</p>

6.7 The Scale Menu



Figure 26: Scale Menu

Setting	Function
Aspect Ratio	<p>Set (see Section 6.7.1) to:</p> <p>Follow Input – If the input resolution \leq output resolution, display with a blank border.</p> <p>input > output is denied and the aspect ratio automatically changes to Follow Output M</p> <p>Follow Output – If the input resolution \leq output resolution, scale up the picture. If the input resolution \geq output resolution, scale down the picture M</p> <p>Best Fit – the best possible compromise between the input and the output aspect ratios M</p> <p>Letterbox – to compress the top and bottom edges of the input signal, but fill the width of the screen M</p> <p><i>Applies to the Single Window display mode only</i></p>
Overscan	Set the overscan (per window) to Off, 5% or 10% M/P
Output	<p>Set the:</p> <p>Output Resolution – to Native, 640x480@60, 640x480@75, 800x600@50, 800x600@60, 800x600@75, 1024x768@50, 1024x768@60, 1024x768@75, 1280x768@50, 1280x768@60, 1280x800@60, 1280x1024@50, 1280x1024@60, 1280x1024@75, 1360x768@60, 1366x768@50, 1366x768@60, 1400x1050@50, 1400x1050@60, 1600x900@60, 1600x900@60, 1600x1200@50, 1600x1200@60, 1680x1050@60, 1920x1200@60, 480i60, 480p60, 576i50, 576p50, 720p50, 720p59.94, 720p60, 1080p23.976, 1080p24, 1080p25, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 2K50 or 2K60 E</p> <p>i Note that any change in the output resolution will cancel the zoom setting and window customization</p> <p>Master Connection – to HDMI, DGKat, PC or SDI to determine the machine's behavior (see Section 6.7.2) E</p> <p>If the native resolution is not supported by the selected Master Connection, the system searches for the best supported resolution. If the search fails (for example, if the master connection is disconnected or EDID is unreadable), the resolution will default to XGA.</p> <p>Deep Color – to Off (the default) for 8bit color depth or to Follow Output for applying deep color automatically on the HDMI output if supported by the display</p>

Setting	Function
Output continued	<p>Note that Follow Output sets the Deep Color of the HDMI and the DGKAt outputs independently, according to the screen connected to each output.</p> <p> A change in the Deep Color setting will take effect after there is a hot plug on the HDMI/DGKAt output or if the user selects a new output resolution.</p> <p>Color Space – to RGB, YPbPr422 or YPbPr444</p> <p>HDCP Mode: Define the HDMI out HDCP activation policy. Set to: Follow Input – to activate the HDCP on all HDMI outputs in the case that the video on the Main or PiP window is HDCP encrypted. Follow Output (This option is recommended when the HDMI output is connected to a splitter/switcher) – to activate the HDCP per output according to the setting of the HDMI acceptor to which it is connected; that is, if the HDMI acceptor is not HDCP compliant, the VP-771 always outputs without HDCP and vice versa.</p> <p>Note that the VP-771 will output a black screen if the output acceptor to which it is connected is not HDCP compliant, in the case that the video on the Main or PiP window is HDCP encrypted.</p>
Zoom Position	<p>Set H Position and V Position, the horizontal and vertical zoom positions respectively, to zoom into certain areas of the image </p> <p>Lets you "move" the zoom area (same as scanning an area with a magnifying glass)</p>
Zoom	<p>Set the zoom </p> <p>Zooms into the center of the display.</p> <p>When zooming in the Freeze state, in case the input resolution is larger than the output resolution, the image may be cut-off or change its position. This can be fixed via Zoom Position (above).</p>
<p> Note that any change in the output resolution will cancel the zoom setting.</p>	

6.7.1 Selecting the Correct Aspect Ratio

You can configure the aspect ratio of any output image to fit your application. The **VP-771** offers four different aspect ratio settings: Follow Input, Follow Output, Best Fit and Letterbox. Here is how each of these settings works.

FOLLOW INPUT – The aspect ratio and resolution of the input video or graphics signal are both preserved (no scaling). For example, a composite video image with a 4:3 aspect ratio will appear with the same aspect ratio on a 1080p (16:9) output image, surrounded by black bars



FOLLOW OUTPUT – The aspect ratio and resolution of the input signal is re-sized to precisely match the aspect ratio and resolution of the **VP-771** output signal. This may result in some distortion to the input signal images



BEST FIT – This setting re-sizes the video or graphics input signal to “best fit” the output resolution while maintaining the aspect ratio of the input signal. For example, a composite video signal (4:3 aspect ratio) will “best fit” to the top and bottom of a widescreen output image, resulting in black pillars on either side.



LETTERBOX – This setting compresses the top and bottom edges of the input signal, but fills the width of the screen. For example, to preserve a widescreen film image on a 4:3 display.



6.7.2 Master Connection Settings

The Master Connection (HDMI, DGKat, PC or SDI) is usually set to the main output display so that the optimal resolution for that display can be obtained. By setting the output resolution to Native, the **VP-771** is triggered to read the EDID of the main display and change the output resolution value according to the native resolution of the display.

Note that when the output resolution is set to Native:

- Selecting SDI as the Master Connection results in an output resolution of 720p @60
- If SDI is selected as the Master Connection, hot plugging the HDMI/DGKat output will not change the output resolution
- If HDMI/DGKat is selected as the Master Connection, and a new display is connected to the Master Connection output (hot plug), the **VP-771** automatically reads the EDID of that display and updates the output resolution accordingly
- If it is not supported by the selected Master Connection, the system searches for the best supported resolution. If the search fails (for example, if the master connection is disconnected or EDID is unreadable), the resolution will default to XGA

6.8 The Miscellaneous Menu

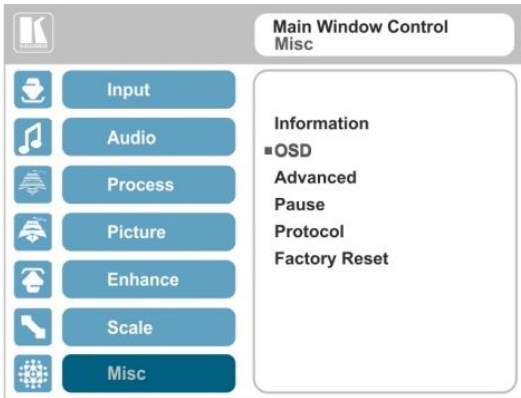















Figure 27: Misc Menu

Setting	Function
Information	<p>Displays the selected input, input resolution and frequency, the output resolution and firmware versions and IP address M/P</p> <p>If the selected output is the native output resolution, it will be displayed under "Native Output" (the master connection will also appear, before "Native Output") ; in case of an explicit output resolution the title will be "Output:"</p> <p>If the input video is encrypted, an HDCP icon appears next to the input information</p>
OSD	<p>Set:</p> <p>Window Control – to Main Window Control to set the OSD menu to control the Main window (letting you select the input and other parameters for the main window) or to PiP Window Control to control the PiP window (letting you select the input and other parameters for the PiP window) E</p> <p>While browsing the OSD menu in the dual window mode, the window control can be toggled instantly with a long press of the PIP button on the front panel and a short press of the PIP button on the IR remote controller.</p> <p>Note that you can select the window control only when in the dual window mode</p> <p>H Position – to set the horizontal position of the OSD E</p> <p>V Position – to set the vertical position of the OSD E</p> <p>Transparency – to set the transparency to On or Off E</p> <p>Transparency Gain – to set the transparency level (once set to transparent) E</p> <p>Transparency Bias – to set the transparency level E</p> <p>Blink – to On for the selected item in the OSD to blink, or Off E</p> <p>Blink Period – to determine the blinking rate E</p> <p>Timeout – to 30 seconds before OSD timeout, 60 seconds before OSD timeout or OFF (Off means that that the OSD appears continuously) E</p>

Setting	Function
Advanced	<p>Set: V Keystone – to set the vertical keystone level </p> <p>Useful if the projector is located at an angle above or below the screen. In the OSD menu the value range shows -80 to 80. For interlaced inputs, this feature is disabled</p> <p>Auto Sync Off – to turn the auto sync On/Off. When ON, 2 minutes after not detecting a valid video signal on the selected input (or both inputs in the dual window mode), the unit will disable the syncs and the audio on all the outputs, until a valid input is again detected or any keypad button is pressed to activate the machine (once restored, the buttons return to their normal function) </p> <p> When using the VP-771 for audio only, we recommend that you turn this feature off</p> <p>Luma Keying – to set the transparency level of the PIP window (see Section 6.8.1) </p> <p>Alert System – to set the Alert system On or Off (see Section 6.8.2) </p>
Pause	<p>Set: Freeze – to ON to freeze the window (freezing the main window will also mute the audio output)  Blank – to ON to display a blank window (blanking the main window will also mute the audio output) </p> <p> Note that any change in the input source may cancel the freeze and blank settings.</p> <p>Mute – to ON to mute the audio output  A mute icon appears on screen</p> <p>Disable Outputs – to turn the sync and audio On/Off. When ON, the unit will disable the syncs and mute the audio output until any keypad button is pressed  Once Disable Outputs is selected, a countdown appears, letting you cancel the process and revert to the previous state</p>
Protocol	<p>Set the communication protocol to P3K or Legacy (see Section 12) </p> <p> When setting the Protocol to Legacy, some PC applications (for example, K-Upload) as well as the Web pages may not function properly.</p>
Test Pattern	<p>Set the Test pattern to Slide Bar (non-HDCP), Color Bar (HDCP) or Off. Each test pattern includes a sinusoid audio signal at 10dB @1kHz. We recommend that you set the Display Mode to Single Window (see Section 6.2) and set the Output Resolution to 1080p (see Section 6.7). Note that the Color Bar test pattern changes the OSD menu coloring and the following message appears on the display: "Ignore OSD Coloring"</p>
Factory Reset	<p>Reset to factory default values (see Section 11.1) </p> <p>Once Factory Reset is selected, a countdown appears, letting you cancel the process and revert to the previous state</p>

6.8.1 The Luma Keying Feature

The luma keying feature lets you display the PiP window (the key image) as semi-transparent over the main window. This feature can be used to have the PiP window display a static or dynamic logo, for example, which will appear on a transparent background.

To apply the luma keying feature, first set the PiP window to the desired size and location and then turn luma keying On. The PiP image will show without its background.

The lower the luminance in the PIP window, the more transparent it becomes, thus letting the main window image show. The higher the luminance, the less transparent it becomes, not letting the main window show through. To use this feature it is recommended to set the PIP image as follows: use low-luminance colors for the background (the key image portion) and high-luminance colors for the logo.



For certain displays, the screen may flicker once for about a second after activating or changing the luma keying setting.

Since luma keying is a volatile parameter, it may reset unexpectedly following a change in the setup. So we recommend that you activate it after completing the setup.

When the luma keying feature is On, any change in the setup (either by the user or by resetting due to a setup change) may cause the screen to flicker once. The luma keying will recover automatically after resetting.

6.8.2 The Emergency Alert System

The Emergency Alert System (EAS) is a unique, versatile feature for immediate text overlaying, with flexible options such as the inclusion of an audio alert siren and the choice of displaying an emergency notification via either a text crawler or a text window.

The EAS provides the ability to have a site-wide notification immediately displayed when an emergency situation develops that could affect the health and welfare of the people attending the site, whether that site is an educational facility, a corporate site, a stadium or any other location where large groups of people come together.

Messages can include specifics about weather (tornadoes, hurricanes, high winds,

flooding, storms and so on), Amber and Silver alerts, safety and security, and also general advisories.

Emergency alert messages are composed and transmitted using the Common Alert Protocol (CAP). CAP is an XML-based application that allows a warning message to be consistently disseminated simultaneously over many warning systems to many proprietary applications and devices. By using XML, messages can be composed, transmitted, and received across a broad range of proprietary AV and other devices.

Generally, CAP format alerts can also trigger secondary functions, such as alert tones, horns, buzzers, and sirens. They can be used to switch on AV equipment to display alerts. The system also complies with the Emergency Alert System (EAS) standard, an official, national warning system in the United States, which works in coordination with the Federal Emergency Management Agency (FEMA) and a number of US national emergency agencies.



For more details on CAP, go to <https://www.oasis-open.org/committees/download.php/6334/oasis-200402-cap-core-1.0.pdf>.

The **VP-771** intercepts XML files over the Ethernet in the CAP format via the dedicated EAS port from the alert generator server (for example, a FEMA server or a proprietary CAP message generation application) for immediate alert message triggering.

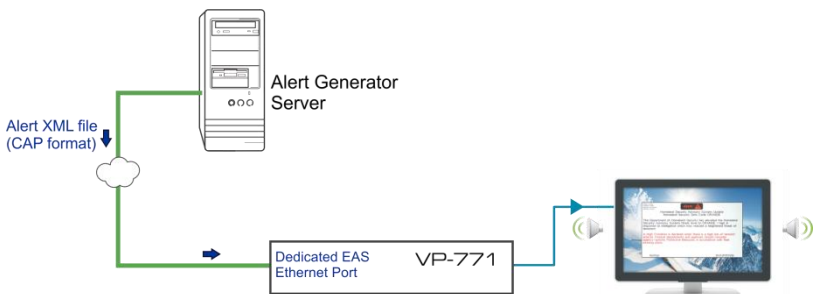


Figure 28: XML File Transfer

The position of the displayed CAP message depends on the severity of the alert. Noticeable messages with “Extreme” and “Severe” headers will appear on the screen and cover up any other content together with an audio alert siren (in case of an Extreme level alert). Messages with lower levels of severity will appear as text crawler along the bottom of the image. When an alert is activated, the system (via P3K) outputs messages according to the activation mode type (see [Section 12.4](#)).



Figure 29: Emergency Alert System Display

The Expiration Date field of the CAP XML file determines when the message will expire. Note that you can remove the message sooner by pressing/clicking any of the buttons on the **VP-771** (front panel or remote control buttons, as well as via the Web page or protocol commands).

To setup and activate the alert system on the **VP-771**:

1. Set the dedicated EAS Ethernet connection port type and port number through which the **VP-771** will be listening, as a client, to intercept alerts. By default, the dedicated EAS port settings are TCP, 5005. To change these setting see the “Emergency Alert Configuration” in the table in [Section 12.2](#).
2. Make sure that the **VP-771** is connected to Ethernet.
3. Make sure that Alert System in the Miscellaneous menu is set to On (see [Section 6.8](#)).

The **VP-771** is now ready to receive any alert and display it.

6.8.2.1 EAS Requirements

The following table specifies the EAS requirements:

Text Length Definitions	
Attribute Name	Max Size
Status	20
Certainty	20
Urgency	20
Severity	20
Event	45
Headline	45
Description	240
Instruction	240
Sender	30
Sent	30
Max 30 contiguous chars per word	
Output Resolution	
The output resolution needs to be at least 1280x768	

7 The Display Modes

The **VP-771** can function in the single window display mode (the factory default setup) or the dual window display mode.

7.1 The Single Window Display Mode

The single window mode shows one window on the screen. The window size can be customized, and its parameters modified via the OSD menu.

7.1.1 Activating the Single Window Mode

Set the **VP-771** to the single window display mode in any of the following ways:

- Press and hold (for 3 seconds) the illuminated front panel PIP button until the button no longer illuminates
- Access the OSD menu, select INPUT>Display Mode, and then choose Single Window
- Access the Web pages (see [Section 8.3](#))
- Via the REMOTE CONTROL terminal block connectors (see [Section 8.4](#))
- Press the PIP window on the remote control transmitter (see [Section 8.5](#))

7.2 The Dual Window Display Mode

The **VP-771** dual window mode feature lets you show two images on one screen: the main window and the PiP window. For example, you can show a live video window on top of a graphic background, or show two images on screen of the same input channel. The PiP window appears even if no input signals are connected. In this case the PiP window appears in dark gray and the main window appears in light gray.

The dual window mode appears in the following preset PiP configurations:

Picture-in-Picture, with a smaller PiP window superimposed over a full main window image



Picture + Picture, where both images appear side-by-side and the aspect ratios of both images are maintained



Split, where both images are placed side-by-side with the same height



The window customization feature (see [Section 6.2](#)) lets you customize the dual window mode layout (main window and PiP window) to any size and position.



You can superimpose any input type over any or the same input.



If the HDMI signal is HDCP protected, it can appear on HDMI and DGM outputs that are connected to supported HDCP compliant displays. However, it cannot appear on a display that is not HDCP compliant and the **VP-771** will not output a picture on the VGA and SDI outputs.

7.2.1 Activating the Dual Window Mode

You can activate the dual window mode (indicated by an illuminated PiP front panel button) in any of the following ways:

- Press and hold (for 3 seconds) the front panel PiP button
The latest PiP configuration appears
- Press the PiP button on the IR remote control transmitter (see [Section 8.5](#))
The latest PiP configuration appears
- Access the OSD menu, select INPUT>Display Mode, and then choose one of the preset PiP configurations (Picture in Picture, Picture + Picture or Split)
- Access the Web pages (see [Section 8.3](#))
- Via the REMOTE CONTROL terminal block connectors (see [Section 8.5](#))

7.2.2 Setting the OSD Menu to PiP Window Control

When the OSD menu is set to PiP Window Control, you can control the PiP window and change its parameters (for example, select the PiP input, size, position and so on). [Section 7.2.3.4](#) shows how to select the PiP source via the OSD menu.

To set the OSD menu to PiP control:

1. Press the MENU button to access the OSD menu.
2. Scroll down to the Misc menu and press ENTER.
3. Select the OSD submenu and press ENTER.
4. Select Window Control and choose PiP WINDOW.
The OSD menu controls the PiP source
5. Press the MENU button to exit and accept changes.
The OSD menu title will show PiP Window Control.
6. You can press the MENU button several times to exit the menu and save changes, or modify PiP window parameters via the other menu items.

To return to Main Window control, repeat the procedure above but select Main Window in the Window Control submenu.

7.2.3 Selecting the PiP Source

To select a PiP source you have to set the **VP-771** to any of the PiP display mode configurations and then select the desired input.

7.2.3.1 Selecting the PiP Source via the Front Panel Buttons

Press and hold the PiP front panel button while pressing the input button of the required PiP source.

For example, to select CV 1 as the PiP source over DP as the main source, press the PiP front panel button while pressing the CV 1 front panel button (see [Figure 30](#)).

In this example, the DP button is illuminated and the CV 1 button blinks



Figure 30: CV1 superimposed over DP

7.2.3.2 Selecting the PiP Source via the IR Remote Control Transmitter

Press the PiP button on the IR transmitter (the PiP front panel button is illuminated). Press the desired PiP source button on the IR transmitter (see [Section 8.5](#)).

7.2.3.3 Selecting the PiP Source via the REMOTE Terminal Block Connector

See [Section 8.4](#).

7.2.3.4 Selecting the PiP Source via the OSD Menu



You can select an input source only after you set the display mode to one of the PiP configurations (see [Section 7.2.1](#)).

To set the PiP source via the OSD menu, do the following:

1. Press the MENU button to access the OSD menu.
2. Scroll through the menu, and for window specific submenus check the menu title:
 - If PiP Window Control appears, continue to step 7
 - If not, continue to the next step
3. Press the ▼ button to move to the Misc menu and press ENTER.
4. Select the OSD submenu and press ENTER.
5. Select Window Control and choose PiP Window Control.
The OSD menu controls the PIP source
6. Press the MENU button a number of times to return to the main OSD menu (and accept changes).
7. Scroll to the Input menu and press ENTER.
8. Select Input Source and press ENTER.
9. Choose the input for the PiP window.
10. Press the MENU a few times until you exit the OSD menu (changes are saved upon exit).

8 Controlling the VP-771

The **VP-771** can be controlled via:

- The front panel buttons (see [Section 8.1](#))
- The OSD menu (see [Section 8.2](#))
- The Web pages (see [Section 8.3](#))
- Remote control contact closure (see [Section 8.4](#))
- The infrared remote control transmitter (see [Section 8.5](#))

8.1 Controlling via the Front Panel Buttons

The **VP-771** includes the following front panel buttons:

- Input selector buttons for selecting the required input: HDMI (1 and 2), PC (1 and 2), COMP, CV (1 and 2), DP and SDI (see [Section 8.1.1](#))
- PIP, BLANK and FREEZE buttons (note, these buttons illuminate when selected)
- MENU (left arrow), ENTER (right arrow), and up, down, arrow buttons
- Output volume up and down buttons (when not in the OSD mode)
- RESET TO XGA/720p and PANEL LOCK buttons

8.1.1 Using the INPUT Front Panel buttons

When selected, an INPUT front panel button behaves as follows:

Selecting the:	Causes the button to:
Main input button	Illuminate continuously
PiP input button	Blink (the light On period is shorter than the light Off period)
Same Main input button and PIP button	Blink (the light On period is longer than the light Off period)



If you want to adjust the image of a selected input in a window, press that input button again (up to 3 times) for fast tuning. Pressing that input button for the fourth time initiates full tuning of the window.

8.2 Controlling via the OSD Menu

You can change PiP Window parameters, main window parameters and entire system parameters via the OSD menu, as described in [Section 6.8](#).

8.3 Controlling via the VP-771 Web Pages

You can remotely operate the **VP-771** using a Web browser via the Ethernet connection (see [Section 8.3.3](#)). To be able to do so, you must use a supported Web browser:

For Windows 7:

- Chrome version 25
- Firefox version 15
- Internet Explorer version 9

For Mac:

- Chrome version 25
- Firefox version 20
- Safari 6

8.3.1 Connecting to the VP-771 via your Browser



Note that if the Protocol is set to Legacy (via the Miscellaneous menu, see [Section 6.8](#)), the Web pages may not function properly.

Make sure that your PC is connected via a network to the **VP-771** and do the following:

1. Open your Internet browser.
2. Enter the unit's IP number or name in the Address bar of your browser.
If you are using DHCP, you have to enter the name.

The default IP number is 192.168.1.39, and may be changed by the system integrator



Figure 31: Entering the IP Number in the Address Bar

You can now control the machine via the Web page.

8.3.2 Connecting to the VP-771 via RS-232

You can connect to the **VP-771** via an RS-232 connection using, for example, a PC. Note that a null-modem adapter/connection is not required.

To connect to the **VP-771** via RS-232, connect the RS-232 9-pin D-sub rear panel port on the **VP-771** unit via a 9-wire straight cable (only pin 2 to pin 2, pin 3 to pin 3, and pin 5 to pin 5 need to be connected) to the RS-232 9-pin D-sub port on your PC.

8.3.3 Connecting the VP-771 via the ETHERNET Port

You can connect the **VP-771** via the Ethernet, using a crossover cable (see [Section 8.3.3.1](#)) for direct connection to the PC or a straight through cable (see [Section 8.3.3.2](#)) for connection via a network hub or network router.

8.3.3.1 Connecting the ETHERNET Port directly to a PC (Crossover Cable)

You can connect the Ethernet port of the **VP-771** to the Ethernet port on your PC, via a crossover cable with RJ-45 connectors.



This type of connection is recommended for identification of the factory default IP Address of the **VP-771** during the initial configuration.

After connecting the Ethernet port, configure your PC as follows:

1. Right-click the My Network Places icon on your desktop.
2. Select **Properties**.
3. Right-click Local Area Connection Properties.
4. Select **Properties**.
The Local Area Connection Properties window appears.
5. Select the Internet Protocol (TCP/IP) and click the **Properties** Button (see [Figure 32](#)).

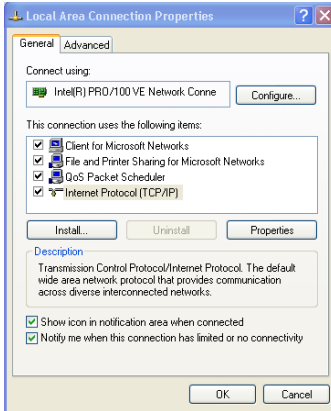


Figure 32: Local Area Connection Properties Window

6. Select Use the following IP Address, and fill in the details as shown in [Figure 33](#). You can use any IP address in the range 192.168.1.1 to 192.168.1.255 (excluding 192.168.1.39) that is provided by your IT department.

7. Click **OK**.

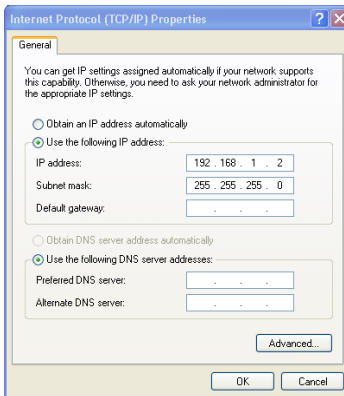


Figure 33: Internet Protocol (TCP/IP) Properties Window

8.3.3.2 Connecting the ETHERNET Port via a Network Hub (Straight-Through Cable)

You can connect the Ethernet port of the **VP-771** to the Ethernet port on a network hub or network router, via a straight-through cable with RJ-45 connectors.

8.3.3.3 Ethernet Port Configuration and Control

Use the Kramer K-UPLOAD software to configure and control the **VP-771** via the Ethernet.



The latest version of K-UPLOAD and installation instructions can be downloaded from the Kramer Web site at

http://www.kramerelectronics.com/support/product_downloads.asp

8.4 Controlling the VP-771 via the REMOTE Terminal Block Connector

The REMOTE terminal block connectors include:

- A PIP pin and a G pin which are used for toggling between the Single and Dual window modes, and for selecting a PIP input
- Nine input pins (defined in the table below) and a G pin for selecting an input

PIN#	Input Source	PIN#	Input Source	PIN#	Input Source
1	HDMI 1	4	PC 2	7	CV 2
2	HDMI 2	5	COMP.	8	DP
3	PC 1	6	CV 1	9	SDI

The contact closure remote control pins operate in a similar way to the INPUT buttons (see [Section 8.1](#)). Using the contact closure remote control (also known as push-to-make momentary contact) you can select any of the inputs. To do so, momentarily connect the required input pin (1 to 9) on the REMOTE terminal block connector to the G (Ground) pin of the REMOTE terminal block connector, as [Figure 34](#) illustrates.



Do not connect more than one input PIN to the GND PIN at the same time.

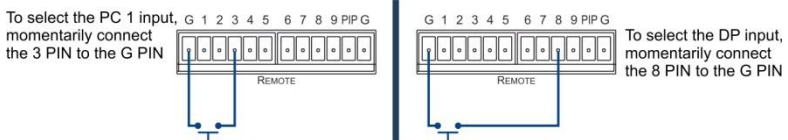


Figure 34: Connecting the Contact Closure Remote Control PINs

Use the PIP pin to:

- Toggle between the Single window display mode and the Dual window display mode, by connecting the PIP pin and the G pin for more than 3 seconds
- Select a PIP source

To select a PIP source, connect the PIP pin to the G pin and, within 3 seconds, momentarily connect an input pin to the G pin. For example, to select the DP PIP source, connect the PIP pin to the G pin and, within 3 seconds, the 5 pin to the G pin, as illustrated in [Figure 35](#).

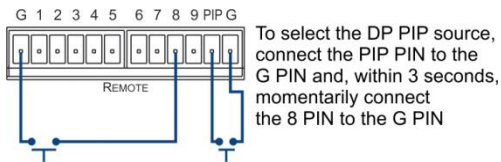


Figure 35: Connecting the PIP Contact Closure Remote Control PINs

8.5 Controlling via the Infrared Remote Control Transmitter

You can control the **VP-771** from the infrared remote control transmitter:



Figure 36: Infrared Remote Control Transmitter

Keys	Function	
POWER	Toggle the power save mode ON or OFF	
PIP	Enter the dual window mode (the latest setting), see Section 7.2 Note that while browsing the OSD menu in the dual window mode, a short press of the PIP button will instantly toggle the window control (between Main and PIP)	
BLANK	Toggle between a blank screen black screen and the display (for both windows)	
FREEZE	Freeze/unfreeze the output video image (for both windows)	
MAIN Source Inputs	HDMI1	Select the HDMI 1 input
	HDMI2	Select the HDMI 2 input
	DP	Select the DisplayPort input
	PC1	Select the UXGA 1 input
	PC2	Select the UXGA 2 input
	SDI	Select the SDI input
	CV1	Select the composite video 1 input
	CV2	Select the composite video 2 input
	YPbPr	Select the component video input
	Press ENTER to access menu levels (when in the OSD) Use the up and down arrows to adjust numerical values and adjust the output volume level (when not within the OSD)	
MENU	Enter/Exit the OSD menu and return to the previous menu level	
MUTE	Toggle between muting (blocking out the sound) and enabling the audio output	
PIP Source Inputs	HDMI1	Select the HDMI1 input
	HDMI2	Select the HDMI2 input
	DP	Select the DisplayPort input
	PC1	Select the UXGA 1 input
	PC2	Select the UXGA 2 input
	SDI	Select the SDI input
	CV1	Select the composite video 1 input
	CV2	Select the composite video 2 input
YPbPr	Select the component video input	
LOCK	Lock the front panel buttons	
RESET to XGA/720P	Press and hold to reset to the default resolution (toggles between RESET TO XGA and 720p)	

8.5.1 Using the IR Transmitter

You can use the IR transmitter to control the machine via the built-in IR receiver on the front panel or, instead, via an optional external IR receiver (Model: C-A35M/IRR-50). The external IR receiver can be located up to 15 meters away from the machine. This distance can be extended to up to 60 meters when used with three extension cables (Model: C-A35M/A35F-50).

Before using the external IR receiver, be sure to arrange for your Kramer dealer to insert the internal IR connection cable (P/N: 505-70434010-S) with the 3.5mm connector that fits into the REMOTE IR opening on the rear panel. Connect the external IR receiver to the REMOTE IR 3.5mm connector.

9 Port Tunneling

The port tunneling feature lets you send and receive simple RS-232 signals between a controller and a serial device via the **VP-771** which is connected to the Ethernet and outputs via TP cable.

The example, illustrated in [Figure 37](#), shows a Kramer room controller that is connected to the **VP-771** via the Ethernet. The DGKAT OUT connector on the **VP-771** is connected via TP to a DGKAT receiver. This DGKAT receiver connects to a display via HDMI and RS-232.

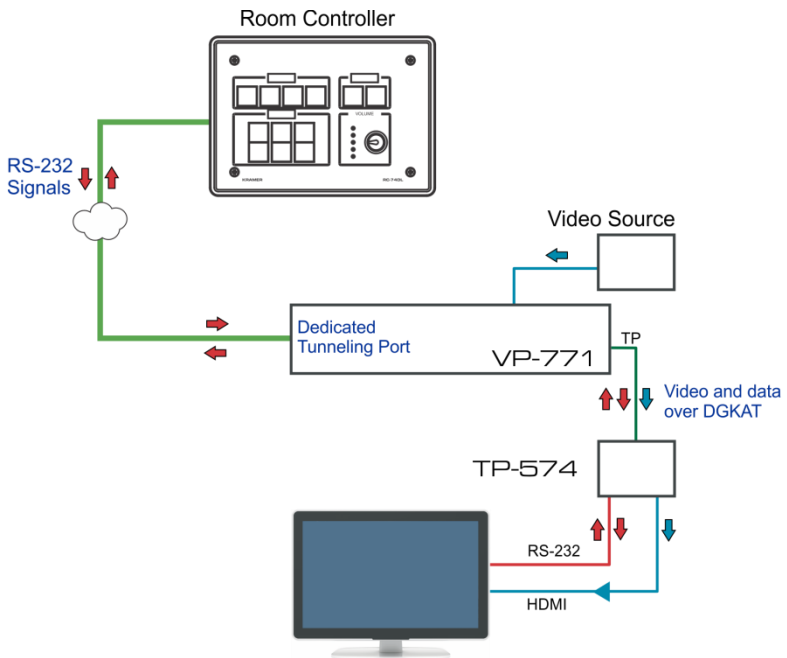


Figure 37: Port Tunneling

The room controller sends RS-232 signals over the Ethernet via a dedicated Tunneling port to the **VP-771**. The **VP-771** sends these signals via TP to a display that is connected to the receiver. This way, control data can flow between the room controller and the display device, tunneling through the **VP-771**.

To setup and activate port tunneling on the **VP-771**:

1. Set the dedicated port tunneling Ethernet connection port type and port number through which the **VP-771** will be passing RS-232 signals.
By default, the dedicated port settings are TCP, 5050.
To change these settings see the “Port Tunneling Configuration” in the table in [Section 12.2](#).
2. Set the DGKAT UART command (the table in [Section 12.2](#)).
By default, the settings are 9600,8,N,1
3. Make sure that the **VP-771** is connected to Ethernet.

The **VP-771** is now ready to tunnel RS-232 signals via Ethernet port tunneling.

10 Flash Memory Upgrade

You can upgrade the **VP-771** via the Kramer K-UPLOAD software. Two types of upgrade files are available for upgrade: video core and audio/graphics (*.fct) and peripherals (*.kfw).



The latest firmware version, the Flash Memory Upgrade user guide, as well as the latest version of K-UPLOAD and installation instructions can be downloaded from the Kramer Web site at

<http://www.kramerelectronics.com/support/downloads.asp>

Note that if the Protocol is set to Legacy (via the Miscellaneous menu, see [Section 6.8](#)), Web pages may not function properly.

11 Technical Specifications

INPUTS:	<p>2 HDMI (deep color) connectors 2 VGA on 15-pin HD connectors 1 component video on 3 RCA connectors 2 composite video on RCA connectors 1 DisplayPort connector 1 SDI on a BNC connector 1 SDI (looping) on BNC connectors 2 HDMI, 2 VGA, 1 DP, 2 CV unbalanced stereo audio on 3.5mm mini jack connectors 1 S/PDIF (for component video input) digital audio on an RCA connector 1 Mic on a 3.5mm mini jack connector with selectable 48V phantom voltage</p>
OUTPUTS:	<p>1 VGA on a 15-pin HD connector 1 SDI on a BNC connector 1 HDMI (deep color) connector 1 DGK at on an RJ-45 connector 1 S/PDIF digital audio on an RCA connector 1 unbalanced stereo audio on a 3-pin terminal block connector 1 2x10W speaker amplifier balanced stereo audio on terminal block connectors</p>
COMPLIANCE WITH HDMI STANDARD:	<p>Supports HDMI (deep color) and HDCP Supports: DisplayPort 1.1a</p>
OUTPUT RESOLUTIONS:	<p>640x480@60, 640x480@75, 800x600@50, 800x600@60, 800x600@75, 1024x768@50, 1024x768@60, 1024x768@75, 1280x768@50, 1280x768@60, 1280x800@60, 1280x1024@50, 1280x1024@60, 1280x1024@75, 1360x768@60, 1366x768@50, 1366x768@60, 1400x1050@50, 1400x1050@60, 1600x900@60, 1600x1200@50, 1600x1200@60, 1680x1050@60, 1920x1200@60, 480i60, 480p60, 576i50, 576p50, 720p50, 720p59.94, 720p60, 1080p23.976, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 2048x1080@60Hz, 2048x1080@50Hz</p>
CONTROLS:	<p>Front panel buttons, OSD, IR remote control, RS-232 on a 9-pin D-sub connector, Ethernet, contact closure</p>
OPERATING TEMPERATURE:	<p>0° to +40°C (32° to 104°F)</p>
STORAGE TEMPERATURE:	<p>-40° to +70°C (-49° to 158°F)</p>
HUMIDITY:	<p>10% to 90%, RHL non-condensing</p>
POWER SOURCE:	<p>100-240V AC, 56VA max.</p>
DIMENSIONS:	<p>19" (W), 9.3" (D) 1U (H) rack mountable</p>
WEIGHT:	<p>2.5kg (5.5lbs) approx</p>
ACCESSORIES:	<p>Power cord, rack "ears", IR remote control</p>
<p>Specifications are subject to change without notice For the most updated resolution list, go to our Web site at http://www.kramerelectronics.com</p>	

11.1 Default Communication Parameters

RS-232		
Protocol	3000 (Default)	Legacy
Baud Rate:	115,200	9,600
Data Bits:	8	8
Stop Bits:	1	1
Parity:	None	None
Command Format:	ASCII	ASCII
Example (Set display mode to Picture in Picture):	#Y 0,110,1<CR>	>Y 0 110 1<CR>
Ethernet		
To reset the IP settings to the factory reset values, power cycle the device while holding in the Ethernet Reset button, located on the rear panel of the unit		
IP Address:	192.168.1.39	
Subnet mask:	255.255.000.000	
Default gateway:	000.000.000.000	
TCP Port #:	5000	
UDP Port #:	50000	
Maximum UDP Ports:	10	
Maximum TCP Ports:	4	
Full Factory Reset		
Front panel buttons	Turn power off. Turn power on again while holding the RESET TO XGA/720p front panel button. The LEDs blink. Full factory reset is complete once the LEDs cease to blink and react normally	
OSD	Factory Reset through the Misc menu item	
Protocol 3000	Use "Factory" command or #Y 0,760,1<CR>	

11.2 Input Resolutions

This section defines the input resolutions for each input

11.2.1 SDI Input Resolutions

SDI Input Resolution			
NTSC	720_P60	1080_P24	1080_P50
PAL	1080_I50	1080_P25	1080_P60
720_P50	1080_I60	1080_P30	

11.2.2 PC Input Resolutions

PC Input Resolutions				
640x480_60	800x600_75	625_P50	1280x1024_60	1400x1050_75
640x480_72	800x600_85	525_P60	1280x1024_75	1600x900_60
640x480_75	1024x768_60	720_P50	1280x1024_85	1600x1200_60
640x480_85	1024x768_70	720_P60	1360x768_60	1680x1050_60
800x600_56	1024x768_75	1280x800_60	1366x768_60	1920x1200_60RB
800x600_60	1024x768_85	1280x960_85	1440x900_60	1080_P50
800x600_72	1152x864_75	1280x768_60	1400x1050_60	1080_P60

11.2.3 DP Input Resolutions

DP Input Resolutions				
640x480_60	800x600_85	1280x800_60	1366x768_60	1920x1200_60RB
640x480_75	848x480_60	1280x960_85	1440x900_60	720_P60
640x480_85	1024x768_60	1280x768_60	1400x1050_60	1080_P60
800x600_56	1024x768_70	1280x1024_60	1400x1050_75	2K50
800x600_60	1024x768_75	1280x1024_75	1600x900_60	2K60
800x600_72	1024x768_85	1280x1024_85	1600x1200_60	
800x600_75	1152x864_75	1360x768_60	1680x1050_60	

11.2.4 YUV Input Resolutions

YUV Input Resolution			
NTSC	720_P50	1080_P30	1080_P50
PAL	720_P60	1080_P23_976	1080_P60
525_P60	1080_I50	1080_P24	1080_P100
625_P50	1080_I60	1080_P25	

11.2.5 CV Input Resolutions

NTSC and PAL

11.2.6 HDMI Input Resolutions

HDMI Input Resolutions				
NTSC	1080_I60	640x480_72	1024x768_70	1360x768_60
PAL	1080_P23_976	640x480_75	1024x768_75	1366x768_60
525_P60	1080_P24	640x480_85	1024x768_85	1440x900_60
625_P50	1080_P25	800x600_56	1152x864_75	1400x1050_60
720_P24	1080_P30	800x600_60	1280x800_60	1400x1050_75
720_P25	1080_P50	800x600_72	1280x960_85	1600x900_60
720_P30	1080_P60	800x600_75	1280x768_60	1600x1200_60
720_P50	2K50	800x600_85	1280x1024_60	1680x1050_60
720_P60	2K60	848x480_60	1280x1024_75	1920x1200_60RB
1080_I50	640x480_60	1024x768_60	1280x1024_85	

11.3 Output Resolutions

This section defines the output resolutions

11.3.1 HDMI Output Resolutions

Technical Specifications of the HDMI Output Signal			
640x480@60	1280x1024@50	1680x1050@60	1080p25
640x480@75	1280x1024@60	1920x1200@60	1080p29.97
800x600@50	1280x1024@75	480i60	1080p30
800x600@60	1360x768@60	480p60	1080p50
800x600@75	1366x768@50	576i50	1080p59.94
1024x768@50	1366x768@60	576p50	1080p60
1024x768@60	1400x1050@50	720p50	2K50
1024x768@75	1400x1050@60	720p59.94	2K60
1280x768@50	1600x900@60	720p60	
1280x768@60	1600x1200@50	1080p23.976	
1280x800@60	1600x1200@60	1080p24	

11.3.2 PC Output Resolutions

Technical Specifications of the PC Output Signal			
640x480@60	1280x1024@75	480p60	1080p29.97
640x480@75	1360x768@60	576i50	1080p30
800x600@60	1366x768@60	576p50	1080p50
800x600@75	1400x1050@60	720p50	1080p59.94
1024x768@60	1600x900@60	720p59.94	1080p60
1024x768@75	1600x1200@60	720p60	2K50
1280x768@60	1680x1050@60	1080p23.976	2K60
1280x800@60	1920x1200@60	1080p24	
1280x1024@60	480i60	1080p25	

11.3.3 SDI Output Resolutions

Technical Specifications of the SDI Output Signal			
480i60	720p60	1080p25	1080p50
576i50	1080p23.976	1080p29.97	1080p59.94
720p50	1080p24	1080p30	1080p60
720p59.94			

12 The VP-771 RS-232 Communication Protocol

The Kramer Protocol lets you control the **VP-771** from any standard terminal software (for example, the Windows® HyperTerminal Application).

12.1 Using the Communication Protocol

There are three different methods to control the **VP-771** via the RS-232 or the Ethernet:

- Protocol commands (via protocol 3000 or Legacy Protocol) mimicking the OSD, see [Section 12.2](#)
- The button functions mimicking the remote controller buttons (as well as the front panel buttons), see [Section 12.3](#)
- Protocol 3000 common commands, see [Section 12.4](#)



All three tables together include all the protocol commands, but they are not identical and do not always include the same information. Some of the data may appear in one or two of the tables but not in the third table and vice versa.

The protocol 3000 communications protocol uses a data rate of 115200 baud, with no parity, 8 data bits, and 1 stop bit.

The Legacy communication protocol uses a data rate of 9600 baud, with no parity, 8 data bits and 1 stop bit. CTS mode and XON/XOFF are set to Off.



Note that if the Protocol is set to Legacy (via the Miscellaneous menu, see [Section 6.8](#)), some PC applications (for example, K-Upload), as well as the Web pages may not function properly.

12.2 Communication Protocol Mimicking OSD

The audio/video protocol commands defines all the function numbers, their valid parameters can be used with protocol 3000 or the Legacy protocol.

12.2.1 Using the Communication Protocol with Protocol 3000 (the “Y” Command)

Set Command:

Type in: “Y Control_Type=0,Function,Param”

Reply: “~id=01Y Control_Type=0,Function,Param OK”

Set command example, set window control (721) to PiP:

Send: “#y 0,721,1”

Reply: “~01@Y 0,721,1 OK”

Get Command:

Type in: “Y Control_Type=1,Function”

Result: “~id=01Y Control_Type=1,Function,Param”

Get command example: get window control setup (721):

Send: “#y 1,721”

Result: “~01@y 1,721,1”



You can add a **last parameter**, to be located fourth in SET or third in GET, to define a specific window.

For example:

Set H Sharpness value to 10 on the PiP window (1): “#y 0,510,10,1”

Get H sharpness of the Main window (0): “#y 1,510,0”

The “Y” command also supports the value increment/decrement of any command using the ‘+’ or ‘-’ signs as the third parameter of the “Y” command.

For example, move the PiP window one step to the left

Send: “#Y 0,141,-,1<CR>”

Reply: “~01@Y 0,141,-,1 OK”

For example, in order to increase zoom on the main window

Send: “#Y 0,650,+,0<CR>”

Reply: “~01@Y 0,650,+,0 OK”

12.2.2 Using the Communication Protocol with Legacy Protocol

Set Command:

Type in: Y■Control_Type■Function■Param[CR]

Reply: Z■Control_Type■Function■Param[CR][LF]

Get Command:

Type in: Y■Control_Type■Function[CR]

Reply: Z■Control_Type■Function■Param[CR][LF]

When sending a command, a blank character may precede [CR] if desired

Example:

Example 1: set brightness value as 32

Send: Y■0■410■32[CR]

Reply: Z■1■410■32[CR][LF]

Example 2: get current output resolution. (4 = SVGA)

Send: Y■1■631[CR]

Reply: Z■1■631■4[CR][LF]

Character Symbols Definitions	
Symbol	Meaning
□	Space
[CR]	Carriage Return, ASCII code 0x0D
[LF] or >	Line Feed, ASCII code 0x0A

12.2.3 Protocol Table: Mimicking OSD

You can associate a function number to its description and valid parameters intuitively by navigating the OSD menu according to the following logic:

A function number is directly related to its location in the OSD menu.

For example, the third menu on the OSD is Process (3 in the hundreds). The second menu item in Process is Film Mode (2 in the tens), therefore the function number for it will be 320 (3rd item on the Main Window Control and the 2nd item in the Process submenu (see also [Section 6.1](#)). When navigating in the OSD MENU you will be able to see the Film Mode valid parameters. The following table defines the protocol commands:

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note		
Input	Display Mode	Single Window		0	110	Single window also displays the aspect ratio in the OSD MENU		
		Picture in Picture		1				
		Picture + Picture		2				
		Split		3				
		Customized		4				
	Input Source	CV1			9	120	In case the window is inactive -1 will be returned	
		CV2			10			
		PC1			11			
		PC2			12			
		HDMI1			13			
		HDMI2			14			
		COMP			15			
		DP			16			
	Input Settings	H Image Shift			20:790	131	Volatile Parameter	
			V Image Shift		4:240	132		
		Auto Positioning	Off			0	133	Not applicable to HD/SD video types
			Normal Scan			1		
			Wide Scan			2		
		HDCP Mode	On			1	134	
			Off			0		
		EDID Select	1024x768 @60			0	135	Applicable to input types with EDID only
			1280x800 @60			1		
			1280x1024 @60			2		
			1366x768 @60			3		
			1440x900 @60			4		
			1400x1050 @60			5		
			1600x900 @60			6		
			1600x1200 @60			7		
	1680x1050 @60				8			
	1920x1200 @60RB				9			
	720p50				10			
	720p60				11			
1080p50				12				
1080p60			13					
2K50			14					
2K60			15					
<p>Note; In case 8bpp is selected, set the color depth bit accordingly. The color depth bit is the MSB of PM.EDID_SEL (which represents the resolution). For example, when selecting 1600x900@60 at: 8bpp, PM.EDID_SEL = 86h=134 dec 12bpp, PM.EDID_SEL = 6h=6 dec</p>								
Color Space	RGB			0	136	Applicable to PC and HDMI inputs only		
	YPbPr			1				
	Follow Input			2				
Window Customization	H Position			0:2048	141	The value range is dynamic. The FW		
	H Width			0:2048	142			

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note
		V Position		0:2048	143	prevents window overlapping and exceeding of boundaries The PiP window horizontal value range is 0-1600
		V Height		0:2048	144	
Audio	Volume	Input Volume		-20:4 [dB]	211	Unavailable in audio pass-through
		Output Volume		-80:20 [dB]	212	
		Mic Volume		-100:12[dB]	213	
	Balance		-10:10 [Ratio]	220		
	Treble		-18:18 [dB]	230		
	Bass		-18:18 [dB]	240		
	Mic Effects	Mic Talkover Depth		0:-100 [%]	251	Unavailable in audio pass-through. Line mix disables talkover
		Mic Talkover Trigger		-100:23 [dB]	252	
		Mic Mix		-100:1 [dB]	253	Unavailable in audio pass-through
		Line Mix		-100:0 [dB]	254	Unavailable in audio pass-through Line mix disables talkover
	Embedded	Pass-through	On	1	261	Unavailable for non-embedded audio
			Off	0		
		Analog Takeover	On	1	262	Unavailable in audio pass-through
			Off	0		
	Delay	Lip Sync		0:90 [ms]	271	
		Mic Delay		0:40 [ms]	272	
	Power Amplifier		Off	0	280	
			Power Level 1	1		
			Power Level 2	2		
			Power Level 3	3		
			Power Level 4	4		
	SDI Channeling	Group A	None	0 (read only)	291	
			Activate CH1	1		
			Activate CH2	2		
Bypass			3			
Group B		None	0 (read only)	292		
		Activate CH1	1			
		Activate CH2	2			
		Bypass	3			
Group C		None	0 (read only)	293		
		Activate CH1	1			
		Activate CH2	2			
		Bypass	3			
Group D	None	0 (read only)	294			
	Activate CH1	1				
	Activate CH2	2				
	Bypass	3				

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note	
		Bypassed Group	Unmute	0	295		
			Mute	1			
Process	Deinterlacing	Method	Line Doubler	0	311	Volatile parameter unavailable in progressive scan	
			Motion Adaptive	1			
		Sync	Current Field	0	312		Unavailable in progressive scan.
			Older Field	1			
	Film Mode	Off		0	320	Unavailable in progressive scan	
		Follow Input		1			
		24PsF Mode		2			
	Diagonal Correction			0:3	330	Unavailable in progressive scan. Unavailable when deinterlacing sync is older field	
	MD Sensitivity	LEVEL1		0	340	Unavailable in progressive scan	
		LEVEL2		1			
		LEVEL3		2			
		LEVEL4		3			
LEVEL5			4				
Picture	Brightness			-400:400	410	In the OSD menu the range appears as -80:80	
	Contrast			0.1:1.6	420		
	Color			0.1:1.6	430		
	Color Correction	Blue		0:4	441		
		Green		0:4	442		
		Flesh		0:4	443		
	Black Level			-80:80	450		
	Gamma Mode	Gamma Off		0	460		
		Gamma 0.4		1			
		Gamma 0.8		2			
		Gamma 1.2		3			
		Gamma 1.6		4			
		Gamma 2.0		5			
		Gamma 2.4		6			
		Gamma 2.8		7			
Dither	Mode0: Disable error diffusion		0	470			
	Mode1: In-frame 8:6 conversion		1				
	Mode2: Intra-frame 8:6 conversion		2				
	Mode3: In-frame 10:8 conversion		3				
	Mode4: Intra-frame 10:8 conversion		4				
	Mode5: In-frame 12:10 conversion		5				
	Mode6: Intra-frame 12:10 conversion		6				
Auto Adjust			0:1	480	Self-clearing		
Enhance	H Sharpness			-10:10	510		
	V Sharpness			-10:10	520		
	Noise Reduction	Mosquito NR		0:3	531	unavailable in progressive scan	
		Combing NR		0:3	532		

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note	
		Temporal NR		0:3	533		
		Block NR		0:3	534	unavailable in progressive scan	
Scale	Aspect Ratio	Follow input		0	610	1. Single window only 2. Customization lost 3. In "Follow Input", output must be bigger than input	
		Follow Output		1			
		Best Fit		2			
		Letterbox		3			
	Overscan	Off		0	620		
		5%		1			
		10%		2			
	Output	Video Resolution	Native		0	631	1. GET command in native mode returns the determined resolution of the master connection 2. Special OSD MENU screen, follow OSD instructions
			640x480@60		1		
			640x480@75		2		
			800x600@50		3		
			800x600@60		4		
			800x600@75		5		
			1024x768@50		6		
			1024x768@60		7		
			1024x768@75		8		
			1280x768@50		9		
			1280x768@60		10		
			1280x800@60		11		
			1280x1024@50		12		
			1280x1024@60		13		
			1280x1024@75		14		
			1360x768@60		15		
			1366x768@50		16		
			1366x768@60		17		
			1400x1050@50		18		
			1400x1050@60		19		
			1600x900@60		20		
			1600x1200@50		21		
			1600x1200@60		22		
			1680x1050@60		23		
			1920x1200@60		24		
			480i60		25		
480p60				26			
576i50				27			
576p50				28			
720p50		29					
720p59.94		30					
720p60		31					
1080p23.976		32					
1080p24		33					
1080p25		34					
1080p29.97		35					

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note	
			1080p30	36			
			1080p50	37			
			1080p59.94	38			
			1080p60	39			
			2K50	40			
			2K60	41			
		Master Connection	HDMI	0	632		
			DGKat	1			
			PC	2			
			SDI	3			
	Deep Color	Off	0	633			
		Follow Output	1				
		Color Space	RGB	0	634	Not applicable to SDI output. Screen may flicker	
			YPbPr422	1			Not applicable to PC output. Screen may flicker
			YPbPr444	2			
		HDCP Mode	Follow Output	0	635		
			Follow Input	1			
		Zoom Position	H Position		0:2047	641	Value range is dynamic, FW prevents zoom from exceeding the boundaries
	V Position			0:2047	642		
	Zoom			1.0:16.0	650		
Misc	Information	NTSC		0	710	<p>READ ONLY: In the OSD MENU - Input, Output video formats & FW version.</p> <p>In the protocol – Get command returns the Input video format only</p>	
		PALM		1			
		PAL60		2			
		N443		3			
		NTSC_4		4			
		SECAM		5			
		PAL		6			
		PALNC		7			
		NTSC_8		8			
		N/A		9			
		N/A		10			
		N/A		11			
		N/A		12			
		N/A		13			
		525p60		14			
		625p50		15			
		720p60		16			
		720p50		17			
		720p24		18			
		720p25		19			
720p30		20					

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note
		1080i60		21		
		1080i50		22		
		N/A		23		
		1080i100		24		
		1080p60		25		
		1080p50		26		
		1080p30		27		
		1080p23_976		28		
		1080p24		29		
		1080p25		30		
		2K50		31		
		2K60		32		
		640x480@60		33		
		N/A		34		
		N/A		35		
		N/A		36		
		640x480@72		37		
		640x480@75		38		
		848x480@60		39		
		640x480@85		40		
		N/A		41		
		800x600@56		42		
		800x600@60		43		
		N/A		44		
		800x600@72		45		
		800x600@75		46		
		800x600@85		47		
		1024x768@60		48		
		1360x768@60		49		
		1280x768@60		50		
		1024x768@70		51		
		1024x768@75		52		
		1280x800@60		53		
		1024x768@85		54		
		1400x1050@60		55		
		1400x1050@75		56		
		1440x900@60		57		
		1152x864@75		58		
		1600x900@60		59		
		1280x1024@60		60		
		1280x1024@75		61		
		1280x960@85		62		
		1920x1200@60RB		63		
		1280x1024@85		64		
		1600x1200@60		65		
		1680x1050@60		66		

1st Level	2nd Level	3rd Level	4th Level	Range	Func.	Note
		NONE		0XF5 or 0XFF		
		Window Control	Main Win	0	721	When in the single window mode, only Main Win is valid
			PiP Win	1		
		H Position		0:2047	722	The value range is dynamic, FW prevents exceeding of boundaries
		V Position		0:2047	723	
		Transparency	ON	1	724	
			OFF	0		
		Transparency Gain		0.1:1.6	725	
		Transparency Bias		-400:400	726	
		Blink	ON	1	727	
			OFF	0		
		Blink Period		0.1:1.6	728	
		Timeout	Off	0	729	
			30 Sec	1		
			60 Sec	2		
	Advanced	V Keystone		-400:400	731	In the OSD menu the value range shows -80:80. Unavailable for interlaced output
		Auto Sync Off	On	1	732	Two idle minutes are required to trigger screen shutdown
			Off	0		
		Luma Keying	On	1	733	Volatile parameter. Screen may flicker. Keying the PiP window
			Off	0		
		Alert System	On	1	734	
			Off	0		
	Pause	Freeze	On	1	741	
			Off	0		
		Blank	On	1	742	
			Off	0		
		Mute	On	1	743	In the PiP Mode, applies to main window only
			Off	0		
		Disable Outputs	On	1	744	
			Off	0		
	Protocol	P3K		0	750	
		Legacy		1		
	Test Pattern	Off		0	760	Non-HDCP content sinusoid sound
		Slide Bar		1		
		Color Bar		2		
	Factory Reset			0:1	770	Follow OSD instructions. Self-clearing.

12.3 Protocol Table: Mimicking Remote and Front Panel Buttons

The keystroke codes operate in the following way:

SET command third param =0,

Syntax example: "#Y 0,10,0<CR>" => MENU keystroke

GET command for keystrokes will return ERR

The following table defines the keystroke function codes:

Button	Keystroke Code	Button	Keystroke Code	Button	Keystroke Code
MENU	10	CH1_VGA1	21	CH2_HDMI1	32
ENTER	11	CH1_VGA2	22	CH2_HDMI2	33
MINUS	12	CH1_HDMI1	23	CH2_YUV	34
PLUS	13	CH1_HDMI2	24	CH2_DP	35
RESET	14	CH1_YUV	25	CH2_SDI	36
PIP	15	CH1_DP	26	MUTE	37
BLANK	16	CH1_SDI	27	POWER	38
FREEZE	17	CH2_CV1	28	LEFT	39
LOCK	18	CH2_CV2	29	RIGHT	40
CH1_CV1	19	CH2_VGA1	30	DUMMY	99
CH1_CV2	20	CH2_VGA2	31		

12.4 The Protocol 3000 Common Operation Commands

Operation commands		
Command	Syntax	Response
Lock front panel	LOCK-FP <u>LOCK-MODE</u>	LOCK-FP <u>LOCK-MODE</u> <u>RESULT</u>
Get front panel locking state	LOCK-FP?	LOCK-FP <u>LOCK-MODE</u>
Parameters Description: <u>LOCK-MODE</u> = Front panel locking state: "0" or "off" to unlock front panel buttons. "1" or "on" to lock front panel buttons.		
Power state	POWER <u>POWER-MODE</u>	POWER <u>POWER-MODE</u> <u>RESULT</u>
Get power state	POWER?	POWER <u>POWER-MODE</u>
Parameters Description: <u>POWER-MODE</u> = power state: "0" or "off" to enter standby mode. "1" or "on" to power up.		
Restart device	RESET	RESET OK
Peripheral firmware update execute*	UPGRADE	UPGRADE OK

Operation commands		
Command	Syntax	Response
Usually the firmware will upload to the device via a command such as LDFW A device reset may be needed to complete the process		
Video core Firmware update execute*	UPGRADES	UPGRADES OK
Reset configuration to factory default	FACTORY	FACTORY <u>RESULT</u>
SET dedicated EAS port settings	EAS-CFG <u>PORTTYPE</u> , <u>PORTNUM</u>	EAS-CFG <u>PORTTYPE</u> , <u>PORTNUM</u> <u>RESULT</u>
GET dedicated EAS port settings	EAS-CFG?	EAS-CFG <u>PORTTYPE</u> , <u>PORTNUM</u>
Parameters Description: <u>PORTTYPE</u> either "TCP" or "UDP" <u>PORTNUM</u> Ethernet port		
EAS Activation Mode notification messages	N/A	EAS-EXE <u>ACTIVATION-MODE</u> OK
Parameters Description: <u>ACTIVATION-MODE</u> = EAS notification: "1" to notify full screen + siren activation mode (Severity = Extreme) "2" to notify full screen activation mode (Severity = Severe) "3" to notify crawler activation mode (Severity = Moderate \ Minor \ Unknown) "0" to notify that the alert went off either by timeout or by keystroke		
SET dedicated port tunneling settings	PTNL-CFG <u>PORTTYPE</u> , <u>PORTNUM</u>	PTNL-CFG CFG <u>PORTTYPE</u> , <u>PORTNUM</u> <u>RESULT</u>
GET dedicated port tunneling settings	PTNL-CFG?	PTNL-CFG <u>PORTTYPE</u> , <u>PORTNUM</u>
Parameters Description: <u>PORTTYPE</u> either "TCP" or "UDP" <u>PORTNUM</u> Ethernet port		
SET UART port tunneling settings	UART <u>BAUD</u> , <u>DATA_BITS</u> , <u>PARITY</u> , <u>STOPBITS</u>	UART <u>BAUD</u> , <u>DATA_BITS</u> , <u>PARITY</u> , <u>STOPBITS</u> <u>RESULT</u>
GET UART port tunneling settings	UART?	UART <u>BAUD</u> , <u>DATA_BITS</u> , <u>PARITY</u> , <u>STOPBITS</u>
Parameters Description: <u>BAUD</u> = 1200, 2400, 4800, 9600, 19200 <u>DATA_BITS</u> = 5 to 8 inclusive <u>PARITY</u> = "NONE", "ODD", "EVEN", "MARK", "SPACE" or the first letter of these words <u>STOPBITS</u> = 1 or 2		
Audio/video common commands		
Command	Syntax	Response
Output volume	VOLUME <u>VOLUME</u> , <u>PARAMETER</u>	VOLUME <u>VOLUME</u> , <u>PARAMETER</u> <u>RESULT</u>
Get output volume	VOLUME?	VOLUME <u>VOLUME-VALUE</u>
Parameters Description:		

VOLUME-PARAMETER = output volume parameters:		
[VALUE] either positive or negative digits (minus sign precedes negative values).		
"+" increase current value,		
"- " decrease current value		
Window customization	WIN-CUST <u>WINDOW</u> , <u>HPOS</u> , <u>HW</u> , <u>VPOS</u> , <u>VH</u>	WIN-CUST <u>WINDOW</u> , <u>HPOS</u> , <u>HW</u> , <u>VPOS</u> , <u>VH</u> <u>RESULT</u>
Parameters Description: fast window customization [WINDOW] "0" for main window; "1" for PiP window [HPOS] horizontal position value [HW] horizontal width value [VPOS] vertical position value [VH] vertical height value		
Set dual window state	PIP <u>PIP-MODE</u>	PIP <u>PIP-MODE</u> <u>RESULT</u>
Get dual window state	PIP?	PIP <u>PIP-MODE</u>
Parameters Description: PIP-MODE = Dual window state: "0" or "off" for single window. "1" or "on" for dual window.		

Identification commands		
Command	Syntax	Response
Protocol Handshaking	#CR	~OK <u>CR</u> <u>LF</u>
Read device model	MODEL?	MODEL <u>MACHINE_MODEL</u>
Read device serial number	SN?	SN <u>SERIAL_NUMBER</u>
Read device firmware version	VERSION?	VERSION <u>MAJOR</u> , <u>MINOR</u> , <u>BUILD</u> , <u>REVISION</u>
Read device build date	BUILD-DATE?	BUILD-DATE <u>YYYY/MM/DD</u> , <u>HH:MM:SS</u>
Read device protocol version	PROT-VER?	PROT-VER 3000: <u>MAJOR</u> , <u>MINOR</u>
Set machine name	NAME <u>MACHINE_NAME</u>	NAME <u>MACHINE_NAME</u> <u>RESULT</u>
Read machine name	NAME?	NAME <u>MACHINE_NAME</u>
Reset machine name to factory default*	NAME-RST	NAME-RST <u>RESULT</u>

Network settings commands		
Network settings commands require admin authorization		
Command	Syntax	Response
Set IP Address	NET-IP <u>IP_ADDRESS</u> , <u>NTIP</u>	NET-IP <u>IP_ADDRESS</u> <u>RESULT</u>

Read IP Address	NET-IP? NTIP?	NET-IP <input type="text" value="IP_ADDRESS"/>
Read MAC Address	NET-MAC? NTMC?	NET-MAC <input type="text" value="MAC_ADDRESS"/>
Set subnet mask	NET-MASK <input type="text" value="SUBNET_MASK"/> NTMSK	NET-MASK <input type="text" value="SUBNET_MASK"/> <input type="text" value="RESULT"/>
Read subnet mask	NET-MASK? NTMSK?	NET-MASK <input type="text" value="SUBNET_MASK"/>
Set gateway address	NET-GATE <input type="text" value="GATEWAY_ADDRESS"/> NTGT	NET-GATE <input type="text" value="GATEWAY_ADDRESS"/> <input type="text" value="RESULT"/>
Read subnet mask	NET-GATE? NTGT?	NET-GATE <input type="text" value="GATEWAY_ADDRESS"/>
Set DHCP mode	NET-DHCP <input type="text" value="DHCP_MODE"/> NTDH	NET-DHCP <input type="text" value="DHCP_MODE"/> <input type="text" value="RESULT"/>
Read subnet mask	NET-DHCP? NTDH?	NET-DHCP <input type="text" value="DHCP_MODE"/>
<input type="text" value="DHCP_MODE"/> = 0 (factory default) – Don't use DHCP (Use IP set by factory or IP set command). 1 – Try to use DHCP, if unavailable use IP as above. 2– Try to use DHCP, if unavailable use AUTO-IP as described here: http://support.microsoft.com/kb/q307287/ .		
Change protocol Ethernet port	ETH-PORT <input type="text" value="PROTOCOL"/> , <input type="text" value="PORT"/> ETHP	ETH-PORT <input type="text" value="PROTOCOL"/> , <input type="text" value="PORT"/> <input type="text" value="RESULT"/>
Read protocol Ethernet port	ETH-PORT? <input type="text" value="PROTOCOL"/> ETHP?	ETH-PORT <input type="text" value="PROTOCOL"/> , <input type="text" value="PORT"/>
<input type="text" value="PROTOCOL"/> = TCP / UDP (transport layer protocol) <input type="text" value="PORT"/> = Ethernet port to enter protocol 3000 commands. 1-65535 = User defined port 0 - reset port to factory default (50000 for UDP, 5000 for TCP)		
Load new peripheral firmware P	Step 1: LDFW <input type="text" value="SIZE"/> Response 1: READY or LDFW <input type="text" value="SIZE"/> <input type="text" value="ERR###"/> Step 2: If ready was received, send <input type="text" value="FIRMWARE_DATA"/> ^P Response 2: LDFW <input type="text" value="SIZE"/> <input type="text" value="RESULT"/>	
Load new video core firmware	Step 1: LDFWS <input type="text" value="SIZE"/> Response 1: READY or LDFWS <input type="text" value="SIZE"/> <input type="text" value="ERR###"/> Step 2: If ready was received, send <input type="text" value="FIRMWARE_DATA"/> ^P Response 2: LDFWS <input type="text" value="SIZE"/> <input type="text" value="RESULT"/>	
Load new audio/graphic memory file.	Step 1: LDMFS <input type="text" value="SIZE"/> Response 1: READY or LDMFS <input type="text" value="SIZE"/> <input type="text" value="ERR###"/> Step 2: If ready was received, send <input type="text" value="FIRMWARE_DATA"/> ^P Response 2: LDMFS <input type="text" value="SIZE"/> <input type="text" value="RESULT"/>	

LIMITED WARRANTY

The warranty obligations of Kramer Electronics for this product are limited to the terms set forth below:

What is Covered

This limited warranty covers defects in materials and workmanship in this product.

What is Not Covered

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Kramer Electronics to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover cartons, equipment enclosures, cables or accessories used in conjunction with this product.

Without limiting any other exclusion herein, Kramer Electronics does not warrant that the product covered hereby, including, without limitation, the technology and/or integrated circuit(s) included in the product, will not become obsolete or that such items are or will remain compatible with any other product or technology with which the product may be used.

How Long Does this Coverage Last

Seven years as of this printing; please check our Web site for the most current and accurate warranty information.

Who is Covered

Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.

What Kramer Electronics will do

Kramer Electronics will, at its sole option, provide one of the following three remedies to whatever extent it shall deem necessary to satisfy a proper claim under this limited warranty:

1. Elect to repair or facilitate the repair of any defective parts within a reasonable period of time, free of any charge for the necessary parts and labor to complete the repair and restore this product to its proper operating condition. Kramer Electronics will also pay the shipping costs necessary to return this product once the repair is complete.
2. Replace this product with a direct replacement or with a similar product deemed by Kramer Electronics to perform substantially the same function as the original product.
3. Issue a refund of the original purchase price less depreciation to be determined based on the age of the product at the time remedy is sought under this limited warranty.

What Kramer Electronics will not do Under This Limited Warranty

If this product is returned to Kramer Electronics or the authorized dealer from which it was purchased or any other party authorized to repair Kramer Electronics products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. Kramer Electronics will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. Kramer Electronics will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programming required for a specific installation of this product.

How to Obtain a Remedy under this Limited Warranty

To obtain a remedy under this limited warranty, you must contact either the authorized Kramer Electronics reseller from whom you purchased this product or the Kramer Electronics office nearest you. For a list of authorized Kramer Electronics resellers and/or Kramer Electronics authorized service providers, please visit our web site at www.kramerelectronics.com or contact the Kramer Electronics office nearest you.

In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized Kramer Electronics reseller. If this product is returned under this limited warranty, a return authorization number, obtained from Kramer Electronics, will be required. You may also be directed to an authorized reseller or a person authorized by Kramer Electronics to repair the product.

If it is decided that this product should be returned directly to Kramer Electronics, this product should be properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization number will be refused.

Limitation on Liability

THE MAXIMUM LIABILITY OF KRAMER ELECTRONICS UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

Exclusive Remedy

TO THE MAXIMUM EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF KRAMER ELECTRONICS CANNOT LAWFULLY DISCLAIM OR EXCLUDE IMPLIED WARRANTIES UNDER APPLICABLE LAW, THEN ALL IMPLIED WARRANTIES COVERING THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THIS PRODUCT AS PROVIDED UNDER APPLICABLE LAW.

IF ANY PRODUCT TO WHICH THIS LIMITED WARRANTY APPLIES IS A "CONSUMER PRODUCT" UNDER THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C.A. §2301, ET SEQ.) OR OTHER APPLICABLE LAW, THE FOREGOING DISCLAIMER OF IMPLIED WARRANTIES SHALL NOT APPLY TO YOU, AND ALL IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR THE PARTICULAR PURPOSE, SHALL APPLY AS PROVIDED UNDER APPLICABLE LAW.

Other Conditions

This limited warranty gives you specific legal rights, and you may have other rights which vary from country to country or state to state.

This limited warranty is void if (i) the label bearing the serial number of this product has been removed or defaced, (ii) the product is not distributed by Kramer Electronics or (iii) this product is not purchased from an authorized Kramer Electronics reseller. If you are unsure whether a reseller is an authorized Kramer Electronics reseller, please visit our Web site at www.kramerelectronics.com or contact a Kramer Electronics office from the list at the end of this document.

Your rights under this limited warranty are not diminished if you do not complete and return the product registration form or complete and submit the online product registration form. Kramer Electronics thanks you for purchasing a Kramer Electronics product. We hope it will give you years of satisfaction.



For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing



P/N: 2900-300096



Rev: 5